

Basic Fail-Safe actuator for controlling dampers in typical commercial HVAC applications.

- Torque motor 35 in-lb [4 Nm]
- Nominal voltage AC/DC 24 V
- Control On/Off
- 1x SPDT





5-year warranty



T_{Δ}	chi	nic:	~ 1	ata
- 16	ш	шс	31110	ala

	Electrical data
--	-----------------

Nominal voltage	AC/DC 24 V
Nominal voltage frequency	50/60 Hz
Nominal voltage range	AC 19.228.8 V / DC 21.628.8 V
Power consumption in operation	5 W
Power consumption in rest position	2.5 W
Transformer sizing	7 VA
Auxiliary switch	1x SPDT, 1 mA3 A (0.5 A inductive), DC 5 VAC 250 V, adjustable 095°
Switching capacity auxiliary switch	1 mA3 A (0.5 A inductive), DC 5 VAC 250 V
Electrical Connection	(2) 18 GA appliance cables, 3 ft [1 m], with 1/2" NPT conduit connectors
Overload Protection	electronic throughout 095° rotation
Electrical Protection	actuators are double insulated
Torque motor	35 in-lb [4 Nm]

Functional data

Torque motor	35 in-lb [4 Nm]
Direction of motion motor	selectable with switch 0/1
Direction of motion fail-safe	reversible with cw/ccw mounting
Angle of rotation	Max. 95°
Running Time (Motor)	75 s / 90°
Running time fail-safe	<25 s @ -4122°F [-2050°C], <60 s @ -22°F [-30°C]
Noise level, motor	50 dB(A)
Noise level, fail-safe	62 dB(A)
Position indication	Mechanical
Power source III	Class 2 Supply

Safety data

Power source UL	Class 2 Supply
Degree of protection IEC/EN	IP54
Degree of protection NEMA/UL	NEMA 2
Enclosure	UL Enclosure Type 2
Agency Listing	cULus acc. To UL 873 and CAN/CSA C22.2 No. 24-93
Quality Standard	ISO 9001
UL 2043 Compliant	Suitable for use in air plenums per Section 300.22(C) of the NEC and Section 602 of the IMC
Ambient humidity	Max. 95% RH, non-condensing
Ambient temperature	-22122°F [-3050°C]
Storage temperature	-40176°F [-4080°C]



Technical data Safety data Servicing maintenance-free Weight Weight Materials Housing material Footnotes †Rated Impulse Voltage 800V, Type of Action 1.AA.B, Control Pollution Degree 3.

Product features

Application

For On/Off, fail-safe control of dampers in HVAC systems. Actuator sizing should be done in accordance with the damper manufacturer's specifications. Control is On/Off from an auxiliary contact or a manual switch. The actuator is mounted directly to a damper shaft from 3/8" up to 1/2" in diameter by means of its universal clamp, 1/2" shaft centered at delivery. For shafts up to 3/4" use K6-1 accessory. A crank arm and several mounting brackets are available for applications where the actuator cannot be direct coupled to the damper shaft.

Operation

The LF series actuators provide true spring return operation for reliable fail-safe application and positive close off on air tight dampers. The spring return system provides consistent torque to the damper with, and without, power applied to the actuator. The LF series provides 95° of rotation and is provided with a graduated position indicator showing 0° to 95°. The actuator may be stalled anywhere in its normal rotation without the need of mechanical end switches. Power consumption is reduced in holding mode. The LF24-S US version is provided with one built in auxiliary switch. This SPDT switch is provided for safety interfacing or signaling, for example, for fan start-up. The switching function is adjustable between 0° and 95°. The auxiliary switch in the LF24-S US is double insulated so an electrical ground connection is not necessary.

Typical specification

On/Off spring return damper actuators shall be direct coupled type which require no crank arm and linkage and be capable of direct mounting to a shaft up to a 3/4" diameter and center on a 1/2" shaft (default). Actuator shall deliver a minimum output torque of 35 in-lbs. The actuator must be designed so that they may be used for either clockwise or counter clockwise failsafe operation. Actuators shall be protected from overload at all angles of rotation. If required, one SPDT auxiliary switch shall be provided with one switch having the capability of being adjustable. Actuators with auxiliary switch must be constructed to meet the requirement for Double Insulation so an electrical ground connection is not required to meet agency listings. Actuators shall be cULus listed, have a 5 year warranty, and be manufactured under ISO 9001 International Quality Control Standards. Actuators shall be as manufactured by Belimo.

Accessories

	Туре
Auxiliary switch, mercury-free	P475
Auxiliary switch, mercury-free	P475-1
Signal simulator, Power supply AC 120 V	PS-100
Conduit box converter	ZG-CBLS
Electrical junction box	
Transformer, AC 120 V to AC 24 V, 40 VA	ZG-X40
Description	Туре
Shaft extension 170 mm ø10 mm for damper shaft ø616 mm	AV6-20
End stop indicator	IND-LF
Shaft clamp	K6 US
for LF	
Shaft clamp reversible, clamping range ø1620 mm	K6-1
Ball joint suitable for damper crank arm KH8 / KH10	KG10A
Ball joint suitable for damper crank arm KH8	KG6
Ball joint suitable for damper crank arm KH8	KG8
	Auxiliary switch, mercury-free Signal simulator, Power supply AC 120 V Conduit box converter Electrical junction box Transformer, AC 120 V to AC 24 V, 40 VA Description Shaft extension 170 mm ø10 mm for damper shaft ø616 mm End stop indicator Shaft clamp for LF Shaft clamp reversible, clamping range ø1620 mm Ball joint suitable for damper crank arm KH8 / KH10 Ball joint suitable for damper crank arm KH8



Accessories

Description	Туре
Damper crank arm Slot width 8.2 mm, for ø1.05"	KH12
Damper crank arm Slot width 6.2 mm, clamping range ø1018 mm	KH6
Damper crank arm Slot width 8.2 mm, clamping range ø1018 mm	KH8
Actuator arm, clamping range ø816 mm, Slot width 8.2 mm	KH-LF
V-bolt Kit for KH-LF.	KH-LFV
Anti-rotation bracket LF.	LF-P
Push rod for KG10A ball joint 36" L, 3/8" diameter	SH10
	SH8
Wrench 0.32 in and 0.39 in [8 mm and 10 mm]	TOOL-06
Angle of rotation limiter, with end stop	ZDB-LF
Form fit adapter 8x8 mm	ZF8-LF
Mounting bracket	ZG-109
Linkage kit	ZG-110
Mounting bracket	ZG-112
for LF	
Damper clip for damper blade, 3.5" width.	ZG-DC1
	ZG-DC2
LF crankarm adaptor kit (includes ZG-112).	ZG-LF112
LF crankarm adaptor kit (T bracket included).	ZG-LF2
Shaft extension for 3/8" diameter shafts (4" L).	ZG-LMSA-1
Shaft extension for 1/2" diameter shafts (5" L).	ZG-LMSA-1/2-5
Weather shield 13x8x6" [330x203x152 mm] (LxWxH)	ZS-100
Baseplate, for ZS-100	ZS-101
Weather shield 406x213x102 mm [16x8-3/8x4"] (LxWxH)	ZS-150
Explosion proof housing 16x10x6.435" [406x254x164 mm] (LxWxH), UL	ZS-260
and CSA, Class I, Zone 1&2, Groups B, C, D, (NEMA 7), Class III,	
Hazardous (classified) Locations	
Weather shield 17-1/4x8-3/4x5-1/2" [438x222x140 mm] (LxWxH), NEMA	ZS-300
4X, with mounting brackets	
Weather shield 17-1/4x8-3/4x5-1/2" [438x222x140 mm] (LxWxH), NEMA	ZS-300-5
4X, with mounting brackets	
Shaft extension 1/2"	ZS-300-C1
Shaft extension 3/4"	ZS-300-C2
Shaft extension 1"	ZS-300-C3
Linkage kit	ZG-JSL
Jackshaft RetroFIT+ Linkage with Belimo Rotary Actuators	

Electrical installation




\(\) Warning! Live electrical components!

During installation, testing, servicing and troubleshooting of this product, it may be necessary to work with live electrical components. Have a qualified licensed electrician or other individual who has been properly trained in handling live electrical components perform these tasks. Failure to follow all electrical safety precautions when exposed to live electrical components could result in death or serious injury.



Meets cULus requirements without the need of an electrical ground connection.

Apply only AC line voltage or only UL-Class 2 voltage to the terminals of auxiliary switches. Mixed or combined operation of line voltage/safety extra low voltage is not allowed.



Provide overload protection and disconnect as required.

Actuators may also be powered by DC 24 V.

Actuators may be connected in parallel if not mechanically linked. Power consumption and input impedance must be observed.


One built-in auxiliary switch (1x SPDT), for end position indication, interlock control, fan startup, etc.



Electrical installation

Wiring diagrams On/Off 24 VAC Transformer Auxiliary Switches Blk (1) Common Wht (2) + Hot

Dimensions

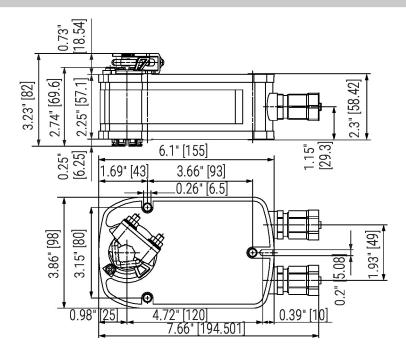

0° to 95°