




### APPLICATIONS:

APPLIANCE | ELECTRICAL | HVAC/R | MARINE | POOL & SPA | RV

# ICM408

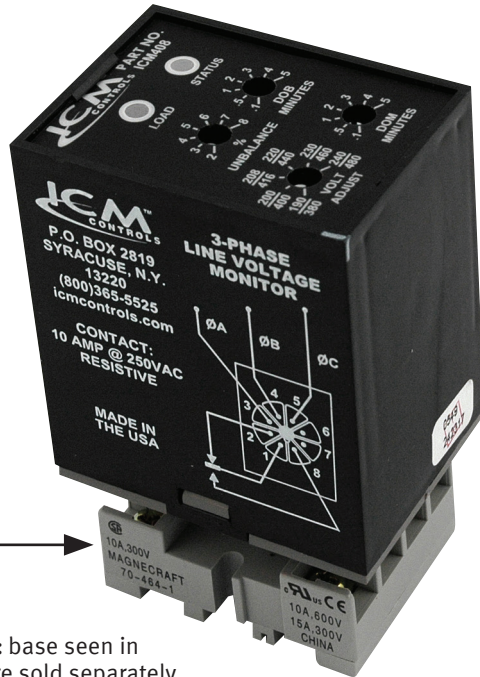

ACS-8: base seen in picture sold separately

## REPLACES

- Mars: 32532, 32534, 32540, 32541, 32542

## FEATURES

- ✓ Reliable 3-phase protection for single side
- ✓ Monitors for phase reversal, phase loss, unbalance % and high/low voltage
- ✓ Bright LED indicators for ON and FAULT
- ✓ High/low voltage cut out:
  - High voltage cut out set point: +12%
  - Low voltage cut out set point: -12%
- ✓ Heavy duty SPDT
- ✓ Phase reversal detection: detects on power up
- ✓ 8-pin plug-in mount (base seen in picture sold separately – Order: ACS-8)

## SPECIFICATIONS

- Voltage: 190-480 VAC
- Frequency: 50/60 Hz
- Adjustable DOB: .1-5 min.
- Adjustable DOM: .1-5 min.
- N.O./N.C. contacts: 10 amps resistive @ 250 VAC
- Power/phase loss detection: within 100 ms
- User selectable unbalance voltage: 2 to 8%
- User selectable delay on make: .1 to 5 minutes