


Permanent Split Capacitor Condenser Fan

5.6" Diameter, Totally Enclosed Air Over (TEAO)




APPLICATIONS:

Residential and commercial condensing unit fan motors.

FEATURES:

- 140°F (60°C) Ambient Design
- Sleeve Bearings have All Angle Thrust System
- Class B Insulation
- Designed for use with 370V Capacitors
- Extended Studs
- 30° Leads
- Hubless Lead End
- Drain Holes Both Ends
- Reversible Rotation
- Automatic Reset Thermal Overload Protector
- Continuous Duty
- Discount Symbol: DS-3HAC

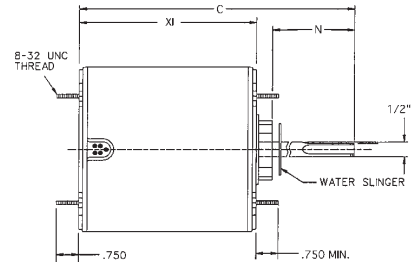

Stud Mount, Without Capacitor, High Ambient Design, All Angle Mount

HP	RPM/Spd.	Volts	Catalog Number	List Price	Bearings	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wgt.	Notes	OEM
1/15	1050	208-230	5459	\$136	Slv	3.0	0.5	3.8	3.8	7.6	9	2, LA	RH
1/12	1100	208-230	3401	\$116	Slv	5.0	0.7	1.6	4.1	5.7	9		CA
1/10	825	208-230	1871	\$109	Slv	3.0	1.0	6.0	3.8	10.4	10		
	1100	208-230	3402	\$116	Slv	5.0	0.8	1.6	4.1	5.7	9		CA
1/8	825	208-230	1872	\$111	Slv	5.0	0.8	6.0	4.1	10.6	11	2	
	825	208-230	5456	\$130	Slv	5.0	1.2	3.8	4.1	7.8	11	2	RH
	825	208-230	9735	\$141	Slv	5.0	1.1	4.8	4.1	8.9	11	LA	RH
1/6	825	208-230	1873	\$119	Slv	5.0	1.0	6.0	4.1	10.6	12	2	
	825	208-230	5457	\$138	Slv	7.5	1.2	3.8	4.6	8.3	13	2	RH
	825/2	208-230	8673	\$146	Slv	5.0	1.0	6.0	4.4	10.9	14		
	1075	208-230	1859	\$80	Slv	5.0	1.0	5.0	3.8	9.4	11		
	1075	208-230	5453	\$131	Slv	3.0	0.7	3.7	3.6	7.3	7	2, LA	RH
	1075	460	3735	\$145	Ball	-	0.5	6.0	-	10.9	10	LA	
1/5	1500	208-230	3405	\$130	Slv	5.0	0.8	1.6	4.1	5.7	9		CA
	1075	208-230	5450	\$131	Slv	3.0	1.3	3.7	3.8	7.5	11	2	RH
1/4	1075	208-230	5454	\$105	Slv	3.0	1.7	3.7	3.8	8.1	11	2	RH
	825	208-230	1874	\$120	Slv	5.0	2.0	6.0	4.3	10.9	13	2	
1/4	825	230	1674	\$149	Slv	12.5	1.7	2.0	4.6	7.1	14	LA	TR
	825	460	1880	\$135	Ball	5.0	1.0	6.0	5.1	11.6	14		
	840	208-230	1123	\$200	Slv	5.0	1.4	2.5	4.6	7.6	16		IC
	850	208-230	1743	\$125	Slv	5.0	1.5	2.8	4.6	7.3	10		YK
	825/2	208-230	8674	\$149	Slv	7.5	2.0	6.0	4.6	11.1	15		
	1075	208-230	1860	\$83	Slv	5.0	1.7	5.0	4.1	9.6	12		
	1075	208-230	1876	\$88	Ball	5.0	1.7	5.0	4.1	9.6	11		
	1075	460	3736	\$158	Ball	7.5	0.8	6.0	4.6	11.1	12		
	1075/2	208-230	8669	\$125	Slv	5.0	1.9	6.0	4.3	10.8	12		1
	1100	208-230	3404	\$134	Slv	5.0	1.8	1.6	4.6	6.2	12		CA
	1625	208-230	1890	\$105	Slv	5.0	1.4	5.0	4.3	9.9	12		
	1/3	825	208-230	1875	\$129	Slv	7.5	2.4	6.0	5.1	11.6	17	2
825		460	1881	\$143	Ball	7.5	1.0	6.0	5.6	12.1	17		
825/2		208-230	8675	\$163	Slv	7.5	2.0	6.0	5.4	11.9	17		

Note 1 1.5" Stud Ext., Shaft End only, 104°F (40°C) Ambient, Double Flats

Note 2 Includes 4 Holes in Shell for Rheem® Mount

Note 3 OEM Replacement for Lennox® p-8-8041

Note 4 Open, Air Over


Note 5 OEM Replacement for Arkl® B14506-261

Note LA Limited Availability

† All non-Emerson Electric Co. marks shown within this document are properties of their other respective owners.

Permanent Split Capacitor Condenser Fan

5.6" Diameter, Totally Enclosed Air Over (TEAO)



APPLICATIONS:

Residential and commercial condensing unit fan motors.

HP	RPM/ Spd.	Volts	Catalog Number	List Price	Bearings	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wgt.	Notes	OEM
1/3	1075	208-230	1861	\$88	Slv	7.5	2.1	5.0	4.6	10.1	14		
	1075	208-230	5455	\$106	Slv	5.0	2.0	3.7	4.1	8.3	13	2	RH
	1075	208-230	1877	\$94	Ball	7.5	2.1	5.0	4.6	10.1	14		
	1075	208-230	7994	\$196	Slv	-	2.2	3.75	-	8.3	16	3, LA	LE
	1075	460	3737	\$168	Ball	7.5	1.3	6.0	5.4	11.9	17		
	1075/2	208-230	8670	\$146	Slv	7.5	2.2	6.0	4.8	11.4	16	1	
	1625	208-230	1891	\$113	Slv	5.0	1.9	5.0	4.6	10.1	13		
1/2	825	208-230	1870	\$169	Slv	12.5	2.8	6.0	6.4	12.4	20		
	825	460	1882	\$154	Ball	10.0	1.6	6.0	6.3	12.9	21		
	825	230	8075	\$220	Ball	-	3.3	3.91	-	8.5	18	4, 5, LA	AR
	1050	460	3320	\$166	Ball	10.0	1.3	3.4	5.8	9.1	13	LA	CA
	1075	208-230	1862	\$98	Slv	10.0	3.0	6.0	5.3	11.9	18		
	1075	208-230	3330	\$156	Slv	7.5	5.1	5.5	6.3	12.9	20	LA	CA
	1075	208-230	1878	\$103	Ball	10.0	3.0	6.0	5.3	11.9	18		
	1075	460	3738	\$186	Ball	10.0	1.5	6.0	5.9	12.4	19		
	1075/2	208-230	8671	\$166	Slv	10.0	2.9	6.0	4.3	10.8	21	1	
	1625	208-230	1892	\$124	Slv	5.0	3.0	5.0	5.1	10.6	15		
3/4	1075	208-230	1868	\$119	Slv	10.0	4.5	5.0	5.8	10.3	20		
	1075	208-230	1879	\$124	Ball	10.0	4.7	5.0	5.8	11.4	21		
	1075	460	3742	\$214	Ball	10.0	2.0	6.0	6.4	12.9	22		

Note 1 1.5" Stud Ext., Shaft End only, 104°F (40°C) Ambient, Double Flats

Note 2 Includes 4 Holes in Shell for Rheem® Mount

Note 3 OEM Replacement for Lennox® p-8-8041

Note 4 Open, Air Over

Note 5 OEM Replacement for Arkla® B14506-261

Note LA Limited Availability

† All non-Emerson Electric Co. marks shown within this document are properties of their other respective owners.