

Permanent Split Capacitor Flex Mount Direct Drive Fan & Blower 5.0" & 5.6" Diameter, Open Air Over




APPLICATIONS:

Designed to meet manufacturer's requirements for use on direct drive fan & blowers with flexible ear mounts.

FEATURES:

- Class B Insulation Unless Noted
- 5.0" Diameter Motors CWLE Rotation
- 5.6" Diameter Motors Reversible Rotation
- Bearings, All Angle Thrust System
- Continuous Duty, Air Over
- 24" Leads
- Automatic Reset Thermal Overload Protector
- PSC Motors Designed For 370V Capacitors
- 208v will not be marked on DOE regulated spread-voltage motors. Refer to online data
- **Discount Symbol: DS-3HAC**

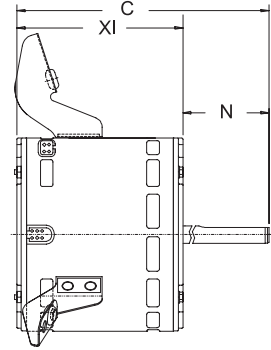

Permanent Split Capacitor 5.0" Diameter

| HP | RPM/ Spd. | Voltage | Catalog Number | List | Cap MFD | Amps | Shaft N | Shell XI | Total C | Ship Wt. | Notes | OEM |
|-----|-----------|---------|----------------|------|---------|------|---------|----------|---------|----------|--------------|-----|
| 1/5 | 1050/1 | 115 | 2867P | ◆ | 5.0 | 3.0 | 3.8 | 4.5 | 8.3 | 8 | H16, H22, CI | MI |

Permanent Split Capacitor 5.6" Diameter

| HP | RPM/ Spd. | Voltage | Catalog Number | List | Cap MFD | Amps | Shaft N | Shell XI | Total C | Ship Wt. | Notes | OEM |
|-----|-----------|---------|----------------|------|---------|------|---------|----------|---------|----------|-------|-----|
| 1/4 | 1075/3 | 115 | 3783 | ◆ | 5.0 | 3.8 | 5.0 | 4.3 | 9.3 | 15 | | |
| | 1075/3 | 208-230 | 3784 | ◆ | 5.0 | 1.7 | 5.0 | 4.3 | 9.3 | 11 | 80 | |
| 1/3 | 825/3 | 230 | 8052 | ◆ | 15.0 | 1.9 | 2.5 | 4.8 | 7.3 | 18 | H16 | LE |
| | 1000/4 | 115 | 9377 | ◆ | 5.0 | 6.0 | 5.3 | 4.6 | 9.8 | 18 | H16 | |
| | 1075/3 | 115 | 3785 | ◆ | 7.5 | 5.0 | 5.0 | 4.6 | 9.6 | 15 | | |
| | 1075/3 | 208-230 | 3786 | ◆ | 5.0 | 2.4 | 5.0 | 4.3 | 9.3 | 15 | | |
| 1/2 | 1075/3 | 115 | 3787 | ◆ | 10.0 | 7.4 | 5.0 | 5.6 | 10.7 | 18 | | |
| | 1075/3 | 208-230 | 3788 | ◆ | 7.5 | 3.3 | 5.0 | 5.3 | 10.3 | 20 | | |

LE = Lennox MI = Miller

◆ Refer to Motorboss for Pricing

Note 80: Canadian Standard — Connected CCWLE (Reversible)

Note CI: Capacitor Included Mounted

Note H16: Rotation CCWLE

Note H22: Flex Mount is Removable

