


Permanent Split Capacitor Condenser Fan 5.6" Diameter, Totally Enclosed Air Over (TEAO)

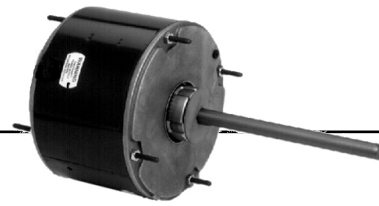


APPLICATIONS:

Residential and commercial condenser unit fan motors to meet manufacturer's requirements.

FEATURES:

- 140°F (60°C) Ambient Design
- Sleeve Bearings Have All Angle Thrust System
- Class B Insulation
- Suitable for Use With 370V Capacitors
- Extended Studs
- 30" Leads
- Hubless Lead End
- Drain Holes Both Ends
- Reversible Rotation
- Automatic Reset Thermal Overload Protector
- Continuous Duty
- **Discount Symbol: DS-3HAC**

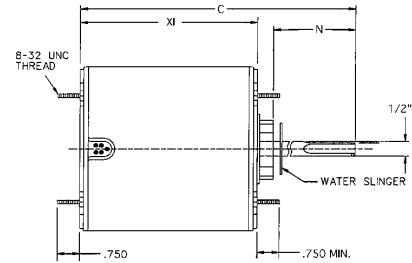

Stud Mount, Without Capacitor, High Ambient (60°C) Design, All Angle Mount

HP	RPM/Spds	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wt. (lbs)	Notes	OEM
1/12	1100	208-230	*3401	\$151	Sleeve	5.0	0.7	1.6	4.1	5.7	9		CA
1/10	825	208-230	1871	\$149	Sleeve	3.0	1.0	6.0	3.8	10.4	10		
	1100	208-230	3402	\$160	Sleeve	5.0	0.8	1.6	4.1	5.7	9		CA
1/8	825	208-230	1872	\$150	Sleeve	5.0	0.78	6.0	4.1	10.6	11	72	
	825	208-230	5456	\$167	Sleeve	5.0	1.2	3.8	4.1	7.8	11	72	RH
1/6	825	208-230	1873	\$164	Sleeve	5.0	1.00	6.0	4.1	10.6	12	72	
	825	208-230	5457	\$177	Sleeve	7.5	1.2	3.8	4.6	8.3	13	72	RH
	825/2	208-230	8673	\$214	Sleeve	5.0	1.0	6.0	4.4	10.9	14		
	1075	208-230	1859	\$101	Sleeve	5.0	1.0	5.0	3.8	9.4	11		
1/5	1500	208-230	3405	\$185	Sleeve	5.0	0.8	1.6	4.1	5.7	9		CA
	1075	208-230	5450	\$168	Sleeve	3.0	1.3	3.7	3.8	7.5	11	72	RH
1/5	1075	208-230	5454	\$135	Sleeve	3.0	1.7	3.7	3.8	8.1	11	72	RH
	1/4 / 1/8	825	208/230	1874	\$164	Sleeve	5.0	2.0	6.0	4.3	10.9	13	72
1/4	825	575	1276	-	Ball	5.0MFD @370V	0.7	5.0	4.8	10.3	10		
	825	460	1880	\$254	Ball	5.0	1.0	6.0	5.1	11.6	14		
	850	208-230	1743	\$167	Sleeve	5.0	1.5	2.8	4.6	7.3	10		YK
	825/2	208-230	8674	\$242	Sleeve	7.5	1.5	6.0	4.6	11.1	15		
	1075	208-230	1860	\$105	Sleeve	5.0	1.5	5.0	4.1	9.6	12		
	1075	208-230	1876	\$108	Ball	5.0	1.5	5.0	4.1	9.6	11		
	1115	460	3736	\$235	Ball	7.5	0.8	6.0	4.6	11.1	12		
	1100	208-230	3404	\$201	Sleeve	5.0	1.8	1.6	4.6	6.2	12		CA
1625	208-230	1890	\$231	Sleeve	5.0	1.4	5.0	4.3	9.9	12			
1/3 / 1/5	825	208-230	1875	\$186	Sleeve	7.5	2.4-1.4	6.0	5.1	11.6	17	72	
1/3	825	460	1881	\$333	Ball	7.5	1.0	6.0	5.6	12.1	17		
	825/2	208-230	8675	\$253	Sleeve	7.5	2.0	6.0	5.4	11.9	17		
	1130	208-230	1861	\$112	Sleeve	7.5	2.0	5.0	4.6	10.1	14		
	1075	208-230	5455	\$144	Sleeve	5.0	2.0	3.7	4.1	8.3	13	72	RH
	1075	208-230	1877	\$115	Ball	7.5	2.0	5.0	4.6	10.1	14		
	1115	460	3737	\$269	Ball	7.5	1.3	6.0	5.4	11.9	17		
	1075/2	208-230	8670	\$222	Sleeve	7.5	2.2	6.0	4.8	11.4	16	71	
	1625	208-230	1891	\$263	Sleeve	5.0	1.9	5.0	4.6	10.1	13		
1/3 / 1/6	825/2	208-230	5464	\$182	Ball	10/7.5	1.9	5.0	5.3	10.3	18	72	
	1075	208-230	3222	\$120	Sleeve	10.0	1.8	5.0	4.6	9.6	11	72	
	1075	208-230	3323	\$124	Ball	7.5	2.0	5.0	4.1	9.1	12	72	
	1075/2	208-230	5462	\$140	Ball	7.5/5.0	2.6	5.0	4.6	9.6	14	72	

CA = Carrier®† RH = Rheem®† YK = York®†

*Rotation CWLE

Note 71 1.5" Studs Shaft End Only, 40C Ambient, Double Flats, ECONOMIZER® Motor


Note 72 Includes Q-4 holes in shell for Rheem®† Mount

† All marks shown within this document are properties of their respective owners.



BRAKEMOTORS
GENERAL PURPOSE SINGLE PHASE
HVAC
WASHDOWN
AGRICULTURE
COMMERCIAL PUMP MOTORS
CLOSE COUPLED PUMP MOTORS
FIRE PUMP MOTORS
POOL & SPA MOTORS
RESIDENTIAL WATER PUMP
ELEVATOR GATE & DOOR
VARIABLE SPEED MOTORS AND DRIVES

Permanent Split Capacitor Condenser Fan 5.6" Diameter, Totally Enclosed Air Over (TEAO)

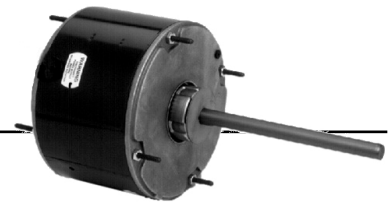

(continued)

HP	RPM	Voltage	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Shell XI	Total C	Ship Wt. (lbs)	Notes	OEM
1/2	825	208-230	1870	\$237	Sleeve	12.5	2.8	6.0	6.4	12.4	20		
	825	460	1882	\$385	Ball	10.0	1.6	6.0	6.3	12.9	21		
	1075	208-230	1862	\$124	Sleeve	10.0	3.1	6.0	5.3	11.9	18		
	1075	208-230	1878	\$127	Ball	10.0	3.1	6.0	5.3	11.9	18		
	1115	460	3738	\$277	Ball	10.0	1.5	6.0	5.9	12.4	19		
	1075/2	208-230	8671	\$257	Sleeve	10.0	2.9	6.0	4.3	10.8	21	71	
	1625	208-230	1892	\$321	Sleeve	5.0	3.0	5.0	5.1	10.6	15		
1/2 / 1/5	1075/2	208-230	5465	\$177	Ball	12.5/10.0	3.0	5.0	5.3	10.3	19	72	
3/4	1075	208-230	1868	\$153	Sleeve	10.0	4.7	5.0	5.8	10.3	20		
	1075	208-230	1879	\$156	Ball	10.0	4.7	5.0	5.8	11.4	21		
	1075	460	3742	\$319	Ball	10.0	2.0	6.0	6.4	12.9	22		

Note 71 1.5" Studs Shaft End Only, 40C Ambient, Double Flats, ECONOMIZER® Motor

Note 72 Includes Q-4 holes in shell for Rheem® Mount

† All marks shown within this document are properties of their respective owners.

