


Permanent Split Capacitor Unit Heater Fan 5.6" & 6.3" Diameter, Totally Enclosed Air Over

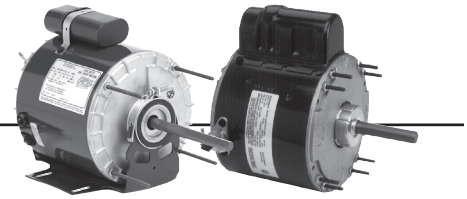

APPLICATIONS:

Designed to meet manufacturer's requirements for use on unit heaters.

FEATURES:

- Continuous Duty, Air Over
- Reversible Motors Are Easily Reversed With Quick Connects
- 2-1/2" Diameter Hub Rings When Furnished
- Automatic Reset Thermal Overload Protector
- Green Ground Lead
- 48 Frame Has 8-32 NF-2A Thread; 56 Frame Has 10-32 NF-2A Thread
- 370V Capacitor Is Furnished
- Leads Are SJO Cord
- Extended Mounting Studs
- Discount Symbol: **DS-3HAC**




Figure A




Figure B

Stud Mount, Single Speed (Fig. A)

HP	RPM/Spd.	Voltage	Catalog Number	List	Diameter (In.)	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wt.	Notes
1/6	1075	115	9034	◆	5.6	4.0	2.6	4.5	5.4	4.6	9.6	0.8	11	
1/4	1075	115	9035	◆	5.6	5.0	3.6	4.5	5.4	4.6	9.6	0.8	16	
1/3	1075	115	9036	◆	5.6	4.0	5.1	4.5	5.4	4.6	9.6	0.8	15	

Resilient Base (Fig. B)

HP	RPM/Spd.	Voltage	Catalog Number	List	Diameter (In.)	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wt.	Notes
1/6	1625	115	1385	◆	5.5	7.5	2.5	3.3	6.6	5.8	9.7	-	11.5	
	1075	115	1386	◆	5.5	7.5	2.6	3.3	6.6	5.8	9.7	-	12.3	
1/4	1075	115	1384	◆	5.5	5.0	3.6	3.3	6.6	5.8	9.7	-	15	
	1725	115	6326	◆	6.5	-	5.0	2.0	7.4	7.9	9.9	1.1	18	
1/3	1075	115	1388	◆	5.5	5.0	5.3	3.3	6.6	5.8	9.7	-	16.4	
1/2	1075/2	230	1810	◆	6.3	10.0	2.5	.9	7.5	6.3	12.8	2.5	27	

◆ Refer to Motorboss for Pricing

