


## Definite Purpose Contactors

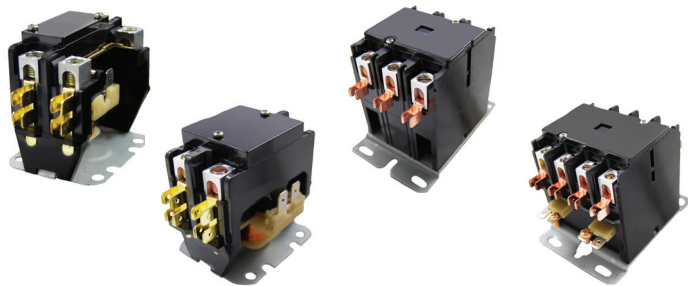

### Features

Contactors meet UL508 specifications for devices up to 600 VAC.

- 50/60 Hertz • US
- Coils have class B insulation
- Includes lugs, spade terminals and covers


Item ID	Poles	F/L Inductive Amps	Locked Rotor Amps 240.277/480/600	Resistive Amps	Coil Voltage
<b>Packard 1 Pole</b>					
C125A	1	25	150/125/100	30	24
C125B	1	25	150/125/100	30	120
C125C	1	25	150/125/100	30	208/240
C130A	1	30	180/150/120	40	24
C130B	1	30	180/150/120	40	120
C130C	1	30	180/150/120	40	208/240
C140A	1	40	240/200/160	50	24
C140B	1	40	240/200/160	50	120
C140C	1	40	240/200/160	50	208/240
<b>Packard 2 Pole</b>					
C220A	2	20	120/100/80	30	24
C220B	2	20	120/100/80	30	120
C220C	2	20	120/100/80	30	208/240
C225A	2	25	150/125/100	35	24
C225B	2	25	150/125/100	35	120
C225C	2	25	150/125/100	35	208/240
C230A	2	30	180/150/120	40	24
C230B	2	30	180/150/120	40	120
C230C	2	30	180/150/120	40	208/240
C230D *	2	30	180/150/120	40	208/240
C230E	2	30	180/150/120	40	277
C240A	2	40	240/200/160	50	24
C240B	2	40	240/200/160	50	120
C240C	2	40	240/200/160	50	208/240
C240E	2	40	240/200/160	50	277

Item ID	Poles	F/L Inductive Amps	Locked Rotor Amps 240.277/480/600	Resistive Amps	Coil Voltage
<b>Packard 3 Pole</b>					
C325A	3	25	150/125/100	35	24
C325B	3	25	150/125/100	35	120
C325C	3	25	150/125/100	35	208/240
C330A	3	30	180/150/120	40	24
C330B	3	30	180/150/120	40	120
C330C	3	30	180/150/120	40	208/240
C330E	3	30	180/150/120	40	277
C330F	3	30	180/150/120	40	480
C340A	3	40	240/200/160	50	24
C340B	3	40	240/200/160	50	120
C340C	3	40	240/200/160	50	208/240
C340E	3	40	240/200/160	50	277
C340F	3	40	240/200/160	50	480
C350A	3	50	300/250/200	65	24
C350B	3	50	300/250/200	65	120
C350C	3	50	300/250/200	65	208/240
C350F	3	50	300/250/200	65	480
C360A	3	60	360/300/240	75	24
C360B	3	60	360/300/240	75	120
C360C	3	60	360/300/240	75	208/240
C360F	3	60	360/300/240	75	480
C375A	3	75	450/375/300	90	24
C375B	3	75	450/375/300	90	120
C375C	3	75	450/375/300	90	208/240
C390A	3	90	540/450/360	120	24
C390B	3	90	540/450/360	120	120
C390C	3	90	540/450/360	120	208/240

Item ID	Poles	F/L Inductive Amps	Locked Rotor Amps 240.277/480/600	Resistive Amps	Coil Voltage
<b>Packard 4 Pole</b>					
C430A	4	30	180/150/120	40	24
C430B	4	30	180/150/120	40	120
C430C	4	30	180/150/120	40	208/240
C430F	4	30	180/150/120	40	480
C440A	4	40	240/200/160	50	24
C440B	4	40	240/200/160	50	120
C440C	4	40	240/200/160	50	208/240
C440F	4	40	240/200/160	50	480

Notes:  
\* Spade terminals and cover only.

## Magnetic Contactor



<b>Item ID</b>	<b>C18001</b>
Type	DPST N.O.
Resistive Amps	30
Full Load Amps	30
Locked Rotor Amps	120
Coil Voltage	24
Hertz	50/60
Maximum Surrounding Air Temp.	40°C
Phase	Single

### Replaces

3ARR8E4      MC11      18001  
90-230

ELECTRICAL