



Reliance Worldwide Corporation

RWC global headquarters

Phone: 1-877-700-4242

Fax: 1-877-700-4280

Email: AskRWC@rwc.com


2300 Defoor Hills Rd. NW

Atlanta, GA 30318

United States

Item # 24615-0000LF, 1/2" Ball Valve with drain and mounting bracket Lead Free

The SharkBite® Ball Valves are high quality forged brass ball valves with SharkBite connections. The SharkBite connections allow the user to connect the ball valves to copper, CPVC and PEX and PE-RT tubing in seconds with relative ease.

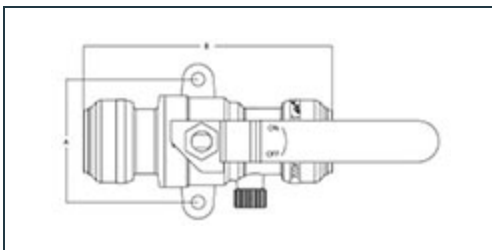

[Specifications](#) | [Dimensions](#) | [Material](#) | [Details](#)

Specifications

Connection Type	SharkBite
Size	1/2"
Maximum temperature	200 °F
Maximum pressure	200 psi
Tube support liner	Polysulfone or polyethersulfone

Specification

The tube shall be inserted into the SharkBite PTC Fitting in the first stage through a release collar and then through a stainless steel grab ring. The grab ring has teeth that open out and grip onto the tube. At the second stage the tube shall be pushed

Certifications

The SharkBite Ball Valve with Drain/Vent and Mounting Bracket 1/2", 3/4" and 1" are certified to IAPMO/ANSI Z1157 NSF/ANSI61 and NSF 372 and listed by IAPMO.

Weight

0.476 lb

Dimensions

B 3.43 in

A 1.68 in

Material

Body Material	DZR Lead Free Brass
Seat Ring Material	PTFE
Ball Material	DZR Lead Free Brass, chrome plated
Body End Retainer	DZR Lead Free Brass
Stem Material	Brass
Oring Material	EPDM
Packing Material	PTFE
Packing Nut	Brass
Handle Material	Zinc plated steel
Handle Nut Material	Zinc plated steel
Grab Ring	Stainless steel

Details

Service

Water

Instant push-to-connect connections for increased ease of use: No soldering, clamps, unions or glue required.

Features

Convenient single lever control: Makes them easy to use and encourages shut-off of water supply.

Full port ball valve: Allows water to flow freely through the valve.