INSTRUMENTS

YJII® VACUUM PUMPS




SPECIFICATIONS	93266	93265 INTL
Free Air Displacement	5 cfm	4 cfm 95 L/M
Ultimate Vacuum	25 microns	25 microns
Number of Stages	2 Stage	2 Stage
Motor	1/2 hp - 1725 rpm	1/2 hp - 3000 rpm
Intake Ports	1/4" and 3/8" SAE	1/4" and 3/8" SAE
Voltage (single phase)	120V (50-60 Hz)	220-240V (50-60 Hz)
Oil Capacity	18 oz (532 ml)	532 ml
Dimensions	13" x 5" x 11"	330 mm x 127 mm x 279 mm
Weight	25.3 lbs (11.5 kg)	10.9 kg

UPC#	Description	
93266	YJII® Vacuum Pump 5cfm	
93265	YJII® Vacuum Pump 4cfm INTL	

YJII® is a compact, lightweight, portable and affordable pump for servicing small systems.

- Deep ultimate vacuum
- Quick flow rate
- Wide range of applications
- · Lightweight, durable aluminum housing
- Small and portable
- Reliable runs steadily for long periods
- Thermal protector in motor to guarantee pump runs steadily and safely
- · High torque motor design for easy start-up and efficient operation, even in the harshest conditions
- 1/4" and 3/8" SAE flare inlet connections allow for flexibility of hose fittings/sizes
- 3/4" garden hose exhaust fitting with removable cap for venting
- Oversized 3/8" oil drain for faster oil changes
- Vacuum pump oil included
- · One-year warranty

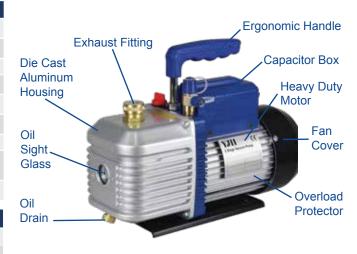

MaxFlow™ EVACUATION KITS



- Perform A/C and refrigeration system evacuations at least 5x faster than using 1/4" hoses
- · Reduce the time it takes to pull and hold vacuum leaving a tight and dry system
- 1/4" (93887) and 5/16" (93889) Core/Vacuum/Charge Tools removes cores that cause restriction
- 1/2" large diameter hose creates full, quicker flow
- · Heavy duty hose won't collapse
- · Vacuum rated to 20 microns
- Opens up over 90% of internal diameter of access hose
- Made in the USA

UPC#	Description
93887	MaxFlow™ Evacuation Kit 3/8" x 1/4" 45°
93889	MaxFlow [™] Evacuation Kit 3/8" x 5/16" 45°