

# 5" Diameter MultiFit® Condenser Fan Motors

## Replaces Hundreds of 1/4 - 1/12 HP Applications

### Features:

- All angle mount
- Ball bearing
- Class B insulation
- Double sealed ball bearings
- Energy efficient PSC design \$
- Reversing plug
- Single speed
- 60° C ambient
- 60 HZ
- 36" leads
- 1/2" Dia. flatted shaf
- Totally enclosed
- Multi-horsepower, one simple connection
- Multi-mounting system

One simple connection eliminates having to select various speeds or change capacitor sizes.



HP	RPM	Speeds	Volts	Amps	Stock Number	Capacitor	Dim. Ref.	Notes
1/8, 1/10, 1/12	1075	1	208-230	0.9	9722	5MFD/370V	1	\$
1/4, 1/5, 1/6	1075	1	208-230	2.0	9723	7.5MFD/370V	2	\$
1/4, 1/5, 1/6	1625	1	208-230	1.6	9724	5MFD/370V	2	\$

## 3-in-1 Design

### Approximate Speeds and Amps in Application

Stock Number 9722			Stock Number 9723			Stock Number 9724 NEW!		
HP	Approximate RPM	Approximate Amps	HP	Approximate RPM	Approximate Amps	HP	Approximate RPM	Approximate Amps
1/8	1075	0.9	1/4	1075	2.0	1/4	1625	1.6
1/10	1135	0.6	1/5	1145	1.2	1/5	1715	1.0
1/12	1155	0.5	1/6	1165	1.0	1/6	1759	0.7

## MultiFit Multi-Mounting System Replaces:

### 4.42BC

Century/Westinghouse Design  
Emerson 42-Frame (5" dia.)

### 4.62BC


GE 42-Frame (5" dia.)  
Fasco 42-Frame (5" dia.)

### 4.33BC

Emerson Clam-Shell  
GE Cap-Can  
Century/Universal Electric Design

### Approximate Dimensions

Ref.	BM	C	N	T
1	4.0	7.5	3.0	.50
2	4.5	7.5	3.0	.50

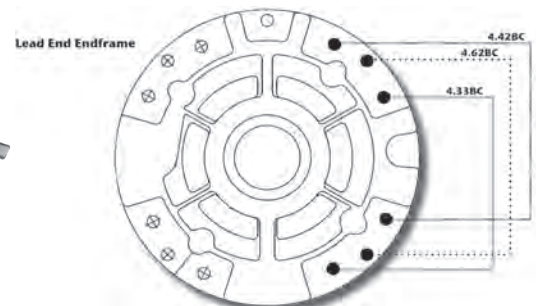

Stock No. 2118

## MultiFit® Adapter Plate

Adapts to a 48-Frame 5.15BC  
Or 42-Frame 3-Point 4.42BC

(Available Separately)

