

CP-M115-230

Product Low Profile, Mini-Split Pump CP-M115, CP-M230

- Features**
- Compact Size
 - Flexible installation options. Fits inside line set covers or inside cassette
 - Clear Reservoir
 - Dual Outlet Reservoir
 - Reservoir Mounting Plate
 - Up to 6' Suction Lift - 24' Total Lift
 - For systems up to 2.8 tons (34,000 BTUs - 10kW)
 - Quiet. < 21dB(A)
 - Thermally Protected
 - Built-IN Overflow Switch - SPDT Alarm Circuit
 - 2 Year Warranty
 - ETL Listed
 - Water Resistant Sensor Cable

Specifications


Voltages	110 - 120VAC or 220 - 240VAC
Hz	50/60Hz
Watts	19W
IP	IP64
Duty Cycle Rating	70%
Sound	<21 dB(A) at 3.3'
Overflow Switch	5A @ 250VAC Resistive
Working Temperature	41°F to 113°F (5°C TO 45°C)
Storage Temperature	37°F to 158°F (3°C TO 70°C)
ETL	4000786 (Conforms to UL STD 778)
CSA	C22.2 NO. 108



UPC

CP-M230	0095247152759
CP-M115	0095247152742

Wire Connection

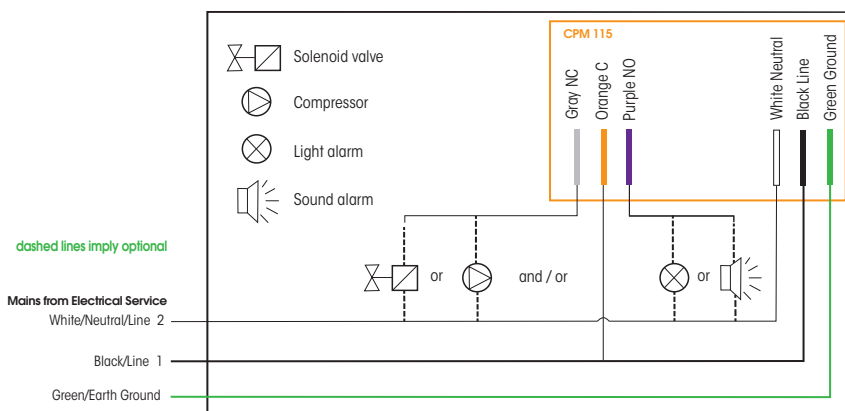

Delivery Flow Rate

