


# LINEMAN'S

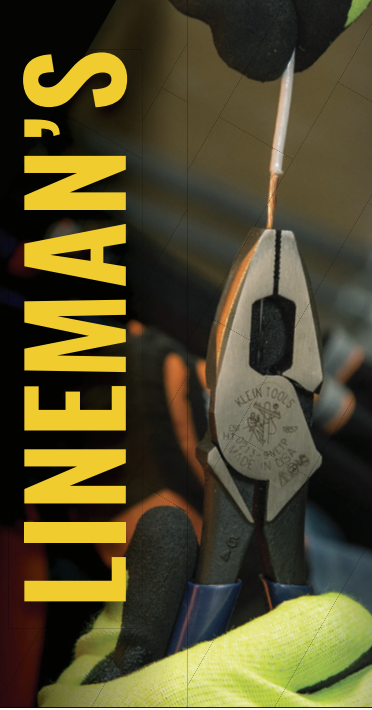

## HIGH-LEVERAGE LINEMAN'S PLIERS

**Unique handle tempering** helps absorb the "snap" when cutting wire

Rivet is closer to cutting edge

**46% GREATER**

cutting and gripping power than other pliers designs

**FORGED STEEL**

from Klein's US-made proprietary blend

**Hot-riveted joint** ensures smooth action and no handle wobble

**Precision-hardened plier head** for on-the-job toughness

**Induction hardened cutting knives** for long life

**Sure-gripping cross-hatched knurled jaws**



### High-Leverage Lineman's Pliers

Includes core High-Leverage Side-Cutting features plus:

- Combination polished and black-oxide finish
- New England nose (Cat. No. J20008 has New England Tapered nose; Cat. No. D213-9 has Square nose)
- Glow-in-the-Dark grips are easily spotted in dark or low lit areas (Cat. No. D2000-9NEGLW)



D213-9NE


#### HANDLE FINISH



SPLIT TETHER RING  
D213-9NETT




Plain



Plastic-Dipped



GLOW-IN-THE-DARK  
Plastic-Dipped



Heavy,  
Plastic-Dipped



JOURNEYMAN™  
Dual-Material



INS INSULATED  
2-Layer  
Protection  
**1000 V**



EINS INSULATED  
3-Layer  
Protection  
**1000 V**



RINS INSULATED  
Multi-Layer  
Protection  
**1000 V**

Cat. No.	Jaw Length	Jaw Width	Jaw Thickness	Knife Length	Handle Color	Handle Finish	Overall Length
213-9NE	1.91" (4.9 cm)	1.25" (3.18 cm)	0.62" (1.57 cm)	0.781" (1.98 cm)	Black	Plain	9.27" (23.5 cm)
2138NEEINS	1.438" (3.65 cm)	1.22" (3.10 cm)	0.625" (1.59 cm)	0.75" (1.91 cm)	Orange/Gray	3-Layer Insulation	8.82" (22.40 cm)
2139NERINS	1.91" (4.9 cm)	1.25" (3.2 cm)	0.62" (1.6 cm)	0.781" (2 cm)	Orange/Light Gray	Multi-Layer Insulation	9.5" (24.1 cm)
2139NEEINS	1.91" (4.9 cm)	1.25" (3.2 cm)	0.62" (1.6 cm)	0.781" (1.98 cm)	Orange/Gray	3-Layer Insulation	9.53" (24.21 cm)
D213-9	1.91" (4.9 cm)	1.24" (3.1 cm)	0.625" (1.59 cm)	0.781" (1.98 cm)	Dark Blue	Plastic-Dipped	9.29" (23.6 cm)
D213-8NE	1.438" (3.65 cm)	1.21" (3.07 cm)	0.625" (1.59 cm)	0.719" (1.83 cm)	Dark Blue	Plastic-Dipped	8.59" (21.82 cm)
D213-9NE	1.91" (4.9 cm)	1.25" (3.18 cm)	0.625" (1.59 cm)	0.781" (2 cm)	Dark Blue	Plastic-Dipped	9.33" (23.70 cm)
D213-9NE-INS	1.91" (4.9 cm)	1.25" (3.18 cm)	0.625" (1.59 cm)	0.781" (2 cm)	Orange	2-Layer Insulation	9.68" (24.59 cm)
D213-9NETT	1.91" (4.9 cm)	1.25" (3.18 cm)	0.625" (1.59 cm)	0.781" (2 cm)	Dark Blue	Plastic-Dipped	9.33" (23.7 cm)
HD213-9NE	1.91" (4.9 cm)	1.25" (3.18 cm)	0.625" (1.59 cm)	0.781" (2 cm)	Light Red	Heavy Plastic-Dipped	9.34" (23.72 cm)
J2138NE	1.441" (3.66 cm)	1.209" (3.07 cm)	0.613" (1.56 cm)	0.719" (1.83 cm)	Dark Blue/Black	Journeyman™ Dual-Material	8.89" (22.58 cm)
J213-9NE	1.91" (4.9 cm)	1.25" (3.18 cm)	0.625" (1.59 cm)	0.781" (2 cm)	Dark Blue/Black	Journeyman™ Dual-Material	9.55" (24.26 cm)
<b>With heavy-duty cutting knives designed to cut ACSR, screws, nails and most hardened wire</b>							
2009NEEINS	1.594" (4.05 cm)	1.25" (3.18 cm)	0.613" (1.56 cm)	0.797" (2.02 cm)	Orange/Gray	3-Layer Insulation	9.53" (24.21 cm)
D2000-7	1.284" (3.26 cm)	1.03" (2.62 cm)	0.53" (1.35 cm)	0.75" (1.91 cm)	Light Blue	Plastic-Dipped	7.77" (19.74 cm)
D2000-8	1.44" (3.66 cm)	1.109" (2.82 cm)	0.6" (1.52 cm)	0.719" (1.83 cm)	Light Blue	Plastic-Dipped	8.59" (21.82 cm)
D2000-9NE	1.594" (4.05 cm)	1.25" (3.18 cm)	0.6" (1.52 cm)	0.781" (1.98 cm)	Light Blue	Plastic-Dipped	9.33" (23.70 cm)
D2000-9NE-INS	1.594" (4.05 cm)	1.25" (3.18 cm)	0.6" (1.52 cm)	0.781" (1.98 cm)	Orange	2-Layer Insulation	9.68" (24.59 cm)
D2000-9NEGLW	1.594" (4.05 cm)	1.25" (3.18 cm)	0.6" (1.52 cm)	0.781" (1.98 cm)	Glow-in-the-Dark	Plastic-Dipped	9.33" (23.70 cm)
HD2000-9NE	1.594" (4.05 cm)	1.25" (3.18 cm)	0.6" (1.52 cm)	0.797" (2.02 cm)	Light Red	Heavy Plastic-Dipped	9.34" (23.72 cm)
J20008	1.441" (3.66 cm)	1.11" (2.82 cm)	0.6" (1.52 cm)	0.719" (1.83 cm)	Light Blue/Black	Journeyman™ Dual-Material	8.76" (22.25 cm)
J2000-9NE	1.594" (4.05 cm)	1.25" (3.18 cm)	0.613" (1.56 cm)	0.797" (2.02 cm)	Light Blue/Black	Journeyman™ Dual-Material	9.55" (24.26 cm)

