

SIDE-CUTTING LONG-NOSE PLIERS

Induction hardened cutting knives for long life

FORGED STEEL

from Klein's US-made proprietary blend

Hot-riveted joint
ensures smooth action and no handle wobble

Slim head design
for working in confined areas

Knurled jaws
for grabbing and looping wire




LONG-NOSE



Side-Cutting Long-Nose Pliers


Includes core Long-Nose features plus:

- Heavier design for greater cutting power
- Extended handles provide added reach and greater leverage
- Curved handles provide greater tool control
- Glow-in-the-Dark grips are easily spotted in dark or low lit areas (Cat. No. D203-8-GLW)
- Spring-loaded action for self-opening (Cat. Nos. D203-6C and D203-7C)

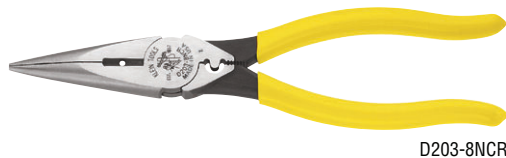


D203-8NCR

NEW

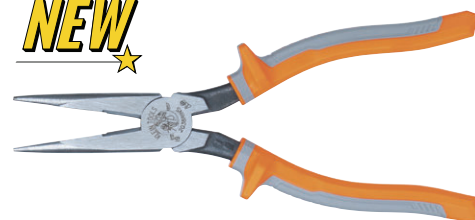

2038RINS

HANDLE FINISH




12 AWG WIRE STRIPPING
D203-8N
J203-8N



12 AWG WIRE STRIPPING
AND CRIMPING
D203-8NCR



19 & 22 AWG
WIRE STRIPPING
D203-6H2



12 AWG SKINNING HOLE
D203-8N-INS



Plastic-Dipped



GLOW-IN-THE-DARK
Plastic-Dipped



JOURNEYMAN™
Dual-Material



INS INSULATED
2-Layer
Protection



EINS INSULATED
3-Layer
Protection



RINS INSULATED
Multi-Layer
Protection



1000 V



1000 V



1000 V

| Cat. No. | Jaw Length | Jaw Width | Jaw Thickness | Point Diameter | Knife Length | Handle Color | Handle Finish | Overall Length |
|--|------------------|-----------------|---------------|------------------|------------------|-------------------|---------------------------|-------------------|
| Heavy-Duty Design With Extended Handles | | | | | | | | |
| 2038EINS | 2.313" (5.89 cm) | 1.02" (2.59 cm) | 0.5" (1.3 cm) | 0.125" (0.32 cm) | 0.693" (1.8 cm) | Orange/Gray | 3-Layer Insulation | 8.77" (22.28 cm) |
| ★ 2038RINS | 2.32" (5.9 cm) | 1.02" (2.6 cm) | 0.5" (1.3 cm) | 0.125" (0.32 cm) | 0.693" (1.8 cm) | Orange/Light Gray | Multi-Layer Insulation | 8.63" (21.9 cm) |
| D203-8 | 2.313" (5.89 cm) | 1.02" (2.59 cm) | 0.5" (1.3 cm) | 0.125" (0.32 cm) | 0.693" (1.8 cm) | Yellow | Plastic-Dipped | 8.41" (21.36 cm) |
| D203-8N | 2.313" (5.89 cm) | 1.02" (2.59 cm) | 0.5" (1.3 cm) | 0.125" (0.32 cm) | 0.693" (1.8 cm) | Yellow | Plastic-Dipped | 8.41" (21.36 cm) |
| D203-8-GLW | 2.313" (5.89 cm) | 1.02" (2.59 cm) | 0.5" (1.3 cm) | 0.125" (0.32 cm) | 0.693" (1.8 cm) | Glow-in-the-Dark | Plastic-Dipped | 8.46" (21.49 cm) |
| D203-8-INS | 2.313" (5.89 cm) | 1.02" (2.59 cm) | 0.5" (1.3 cm) | 0.125" (0.32 cm) | 0.693" (1.8 cm) | Orange | 2-Layer Insulation | 8.91" (22.63 cm) |
| D203-8N-INS | 2.313" (5.89 cm) | 1.02" (2.59 cm) | 0.5" (1.3 cm) | 0.125" (0.32 cm) | 0.693" (1.8 cm) | Orange | 2-Layer Insulation | 8.91" (22.63 cm) |
| D203-8NCR | 2.313" (5.89 cm) | 1.02" (2.59 cm) | 0.5" (1.3 cm) | 0.125" (0.32 cm) | 0.693" (1.8 cm) | Yellow | Plastic-Dipped | 8.42" (21.39 cm) |
| J203-8 | 2.313" (5.89 cm) | 1.02" (2.59 cm) | 0.5" (1.3 cm) | 0.125" (0.32 cm) | 0.693" (1.8 cm) | Yellow/Black | Journeyman™ Dual-Material | 8.42" (21.39 cm) |
| J203-8N | 2.313" (5.89 cm) | 1.02" (2.59 cm) | 0.5" (1.3 cm) | 0.125" (0.32 cm) | 0.693" (1.8 cm) | Yellow/Black | Journeyman™ Dual-Material | 8.42" (21.39 cm) |
| Standard Design With Curved Handles | | | | | | | | |
| 2036EINS | 1.9" (4.83 cm) | 0.688" (1.8 cm) | 0.375" (1 cm) | 0.094" (0.24 cm) | 0.572" (1.45 cm) | Orange/Gray | 3-Layer Insulation | 6.9" (17.53 cm) |
| 2037EINS | 2.42" (6.15 cm) | 0.688" (1.8 cm) | 0.375" (1 cm) | 0.094" (0.24 cm) | 0.572" (1.45 cm) | Orange/Gray | 3-Layer Insulation | 7.43" (18.87 cm) |
| D203-6 | 1.969" (5.0 cm) | 0.688" (1.8 cm) | 0.375" (1 cm) | 0.094" (0.24 cm) | 0.572" (1.45 cm) | Yellow | Plastic-Dipped | 6.67" (16.94 cm) |
| D203-6C | 1.969" (5.0 cm) | 0.688" (1.8 cm) | 0.375" (1 cm) | 0.094" (0.24 cm) | 0.572" (1.45 cm) | Yellow | Plastic-Dipped | 6.67" (16.94 cm) |
| D203-6-INS | 1.969" (5.0 cm) | 0.688" (1.8 cm) | 0.375" (1 cm) | 0.094" (0.24 cm) | 0.572" (1.45 cm) | Orange | 2-Layer Insulation | 6.9" (17.53 cm) |
| D203-7 | 2.43" (6.17 cm) | 0.688" (1.8 cm) | 0.375" (1 cm) | 0.094" (0.24 cm) | 0.572" (1.45 cm) | Yellow | Plastic-Dipped | 7.17" (18.21 cm) |
| D203-7C | 2.43" (6.17 cm) | 0.688" (1.8 cm) | 0.375" (1 cm) | 0.094" (0.24 cm) | 0.572" (1.45 cm) | Yellow | Plastic-Dipped | 7.17" (18.21 cm) |
| D203-7-INS | 2.43" (6.17 cm) | 0.688" (1.8 cm) | 0.375" (1 cm) | 0.094" (0.24 cm) | 0.572" (1.45 cm) | Orange | 2-Layer Insulation | 7.37" (18.72 cm) |
| D203-6H2 | 1.876" (4.77 cm) | 0.688" (1.8 cm) | 0.375" (1 cm) | 0.094" (0.24 cm) | 0.572" (1.45 cm) | Yellow | Plastic-Dipped | 6.625" (16.83 cm) |
| J203-6 | 1.876" (4.77 cm) | 0.688" (1.8 cm) | 0.375" (1 cm) | 0.094" (0.24 cm) | 0.572" (1.45 cm) | Yellow/Black | Journeyman™ Dual-Material | 6.75" (17.15 cm) |
| J203-7 | 2.438" (6.19 cm) | 0.688" (1.8 cm) | 0.375" (1 cm) | 0.094" (0.24 cm) | 0.572" (1.45 cm) | Yellow/Black | Journeyman™ Dual-Material | 7.32" (18.59 cm) |



Pliers
Strippers, Cutters,
and Crimpers
Drivers and
Wrenches
Conduit Tools
and Measurement
Tool Kits
Safety, PPE
and Comfort
Job Site
Accessories
Tool Storage
Voice/Data/Video
Test and
Measurement
Power Tools
and Accessories
Lifting, Pulling
and Structural