

TIP SERIES	ACETYLENE CONSUMPTION SCFH	OXYGEN PRESSURE (PSIG)	ACETYLENE/FUEL PRESSURE (PSIG)	OVERALL LENGTH	BRAZING COPPER TUBING	USE WITH WELDING HANDLE #
------------	----------------------------	------------------------	--------------------------------	----------------	-----------------------	---------------------------

APPLICATION  
BRAZING  
HEATING

MTF

### CAP'N HOOK® High performance OXYACETYLENE brazing tips that provide precise concentrated heat up to 6000°F.

MTF-5	4-6	8	5	5 1/2"	1"	71 WH250 WH550
MTF-9	5-9	10	7	8 1/2"	2"	
MTF-17	8-14	18	17	11"	3"	


MAPP®/PROPANE CONSUMPTION SCFH	OXYGEN PRESSURE (PSIG)	MAPP®/PROPANE PRESSURE (PSIG)	OVERALL LENGTH	BRAZING COPPER TUBING	USE WITH WELDING HANDLE #
--------------------------------	------------------------	-------------------------------	----------------	-----------------------	---------------------------

### CAP'N HOOK® High performance MAP//Pro® or PROPANE/OXYGEN brazing tips that provide precise concentrated heat up to 6000°F.

MTFM-5	2.6	10	5	5 1/2"	1"	71 WH250 WH550
MTFM-9	3.1	15	7	8 1/2"	2"	
MTFM-17	5.6	20	10	11"	3"	



U.S. Pat. No. 6,191,333

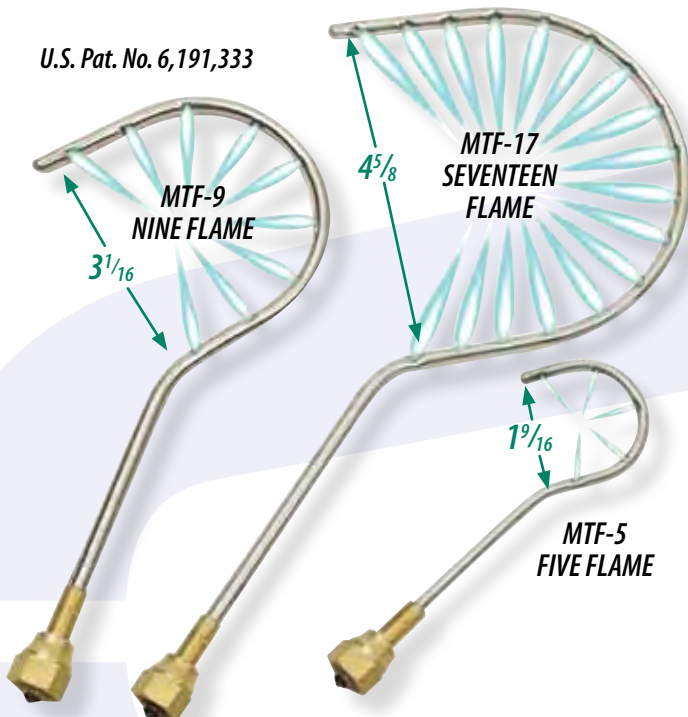

The patented Uniweld Cap'n Hook® high performance tip transfers high heat directly onto your work area and away from nearby sensitive areas. Stainless steel construction provides a stable flame time after time while holding its shape. Cap'n Hook® tips provide rapid, even heat distribution for excellent brazing and flow of alloy.



### UNIWELD F15 ADAPTOR



The new! Uniweld F15 Adaptor lets you attach the popular Cap'n Hook® Tip to a WH350 V-Style welding handle. This handy weld/braze accessory allows you to easily adapt your toolbox full of Type17, Cap'n Hook, Type28 and Tuning Fork™ tips to fit on the larger WH350 V-style welding handle. It is machined out of solid brass and will stand up to years of on-the-job use.



NOTE: All tips attached to WH350 handle with F15 adaptor must only be hand tightened.