


## PARKER - SIGHT GLASS AND MOISTURE INDICATORS

### KEY FEATURES AND BENEFITS

- Available in all popular end connections up to 2-1/8 inch
- Solid copper extended sweat fittings permit solder installation without disassembly.
- Flare models feature forged brass body and fittings.
- Compact design, low silhouette, short laying in length.
- Extremely accurate.
- Easy viewing.
- U.L. listed File No. SA4744.

### Sight Glass Moisture Indicator Dimensions

PSG-10T Replacement indicator element and o-ring.

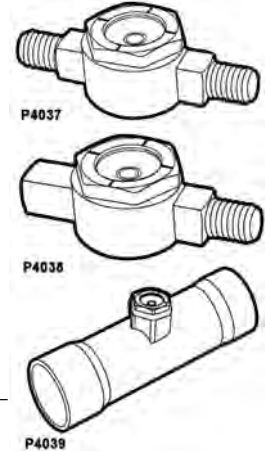

PART NO	MODEL NO	FITTING SIZE (in)	FITTING TYPE	OVERALL LENGTH (in)	CUT OUT LENGTH (in)
070293-01	PSG-2	1/4	SAE Male Flare	3.42	--
070294-02	PSG-3	3/8	SAE Male Flare	3.56	--
070295-03	PSG-4	1/2	SAE Male Flare	3.82	--
070296-04	PSG-5	5/8	SAE Male Flare	4.06	--
070281-01	PSG-2MF	1/4	SAE Male x Female Flare	3.05	--
070282-02	PSG-3MF	3/8	SAE Male x Female Flare	3.17	--
070133-03	PSG-4MF	1/2	SAE Male x Female Flare	3.39	--
070284-04	PSG-5MF	5/8	SAE Male x Female Flare	3.69	--
070135-01	PSG-2S	1/4	Sweat	4.88	4.19
070135-02	PSG-3S	3/8	Sweat	4.88	4.12
070135-03	PSG-4S	1/2	Sweat	4.88	3.87
070135-03	PSG-5S	5/8	Sweat	4.88	3.62
070132-01	PSG-7S	7/8	Sweat	6.25	4.73
070132-02	PSG-9S	1-1/8	Sweat	6.25	4.45
070278-11	PSG-11S	1-3/8	Sweat	7.97	6.03
070289-13	PSG-13S	1-5/8	Sweat	7.97	5.79
070280-17	PSG-17S	2-1/8	Sweat	7.97	5.47

Moisture Color Indications in PPM at Liquid Specific Temperatures:

SYSTEM REFRIGERANT	12	22	134a	401A	401B/C	404A	410A	502	507A	
<b>LIQUID LINE TEMPERATURE</b>	75° F	75° F	75° F	75° F	75° F	75° F	75° F	75° F	75° F	
SYSTEM CONDITIONS	INDICATOR COLOR									
<b>Dry</b>	<b>Green</b>	below 5	below 30	below 35	below 120	below 50	below 40	below 69	below 10	below 33
<b>Caution</b>	<b>Yellow/Green</b>	5 -15	30-110	35-120	120-420	50-175	40-140	69-240	10-50	33-115
<b>Wet</b>	<b>Yellow</b>	above 15	above 110	above 120	above 420	above 175	above 140	above 240	above 50	above 115