




APPLICATIONS:

APPLIANCE | ELECTRICAL | HVAC/R | MARINE | POOL & SPA | RV

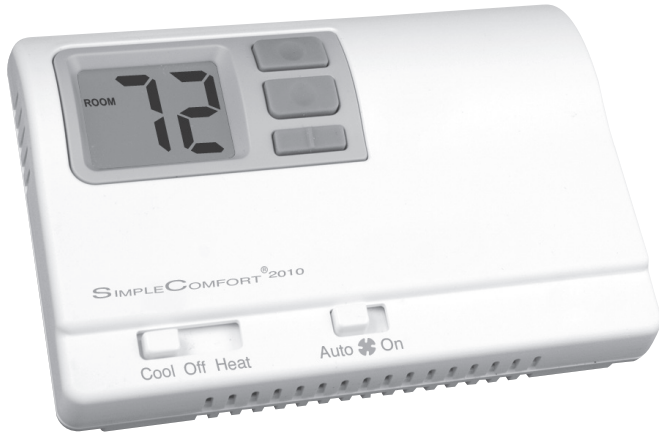

FEATURES

- ✓ For single-stage heat/cool or single-stage heat pump
- ✓ ICM patented thermal intrusion barrier
- ✓ Large display with backlight
- ✓ Adjustable temperature differential
- ✓ Easy access terminal block
- ✓ Field adjustable calibration
- ✓ 4- or 5-wire compatible
- ✓ Dual powered
- ✓ Manual changeover
- ✓ Freeze protection
- ✓ Selectable °F and °C
- ✓ Keypad lockout

SPECIFICATIONS

- **Electrical rating:** 24 VAC (18-30 VAC), 1 amp maximum per terminal
- **Temperature control ranges:** 45°F to 90°F, Accuracy ± 1°F
- **Terminations:** RC, RH, C, W, Y, O, B, G

Content and specifications on sell sheets subject to change without notice.