

SLT SERIES



- Metal Case with Waterproof Epoxy Potting
- Heavy Duty Rating 10 Amps @ 120 Volts / 5 Amps @ 240 Volts
- Residential and Commercial Applications
- Switching is SPST
- Rated Up To 1200 Watts
- Uses SL249 Tube Clip



Part No.	Open °F	Close °F	Diff. °F
SLT45	22	45	23
SLT50	50	10	40
SLT55	25	55	30

MOUNTING CLIPS



Part No.	Style
SL243	Surface / Flush Mounting Clip



Part No.	Style
SL245	Push In Mounting Clip




Part No.	Style
SL247	5/16" or 3/8" Around Tube Clip



Part No.	Style
SL249	5/16" & 3/8" Side Tube Clip

THERMAL CUT OFFS

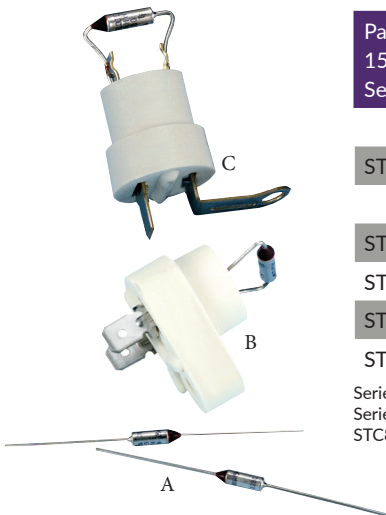


Part No. 15 Amp Series 1	Part No. 25 Amp Series 2	Open Temp °C	Open Temp °F	Style	Part No. 15 Amp Series 1	Part No. 25 Amp Series 2	Open Temp °C	Open Temp °F	Style
	STC8170	77	170	A	STC4358		184	363	A
STC4228		109	228	A	STC4438		226	438	A
	STC8242	117	242	A	STC4468		242	468	A
STC4257		125	257	A	STC5257		125	257	B
STC4283	STC8283	139	283	A	STC5300		149	300	B
STC4300		149	300	A	STC5333		167	333	B
STC4333		167	333	A	STC5377		192	377	B
					STC6257		125	257	C
					STC86283		139	283	C
					STC6300		149	300	C
					STC6333		167	333	C
					STC86377		192	377	C

Series 1 Maximum Wattage 1800W @ 120V/2400W @ 240
 Series 2 Maximum Wattage 1800W @ 120V/6000W @ 240
 STC8170, STC8242, STC8283 Electrical Rating: G8AO1O

STC4358 Electrical Rating: G4AO1
 STC5257, STC5300, STC5333, STC5377 Electrical Rating: G4AMO6
 STC6333 Electrical Rating: GHAMO4
 STC86377 Electrical Rating: G8AMO4OO

36T ELECTRICAL RATING:
 TYPICAL ELECTRICAL RATINGS TEMP RANGE: -40°F TO 350°F



Part No.	Terminals	°C	°F	Style
STF4170	QC. 1/4"	77	170	36T
STF4230	QC. 1/4"	110	230	36T
STF4291B	QC. 3/16"	144	291	36T

Maximum Wattage 1800W @ 120V/2400W @ 240
 STF4291B Electrical Rating: G4AP02OO

Volts (VAC)	Resistive (Non-Inductive)	Motor Rating (Inductive)		
		Full Load	Locked Rotor	Pilot Duty
120	15A	3A	12A	125VA
240	10A	1.5A	6A	125VA

350°F Max Ambient Temperature