

# Fluorescent Leak Detection Products & System Additives for AC&R Systems



Trusted by more HVAC/R  
OEMs than any other brand...



BRISTOL  
COMPRESSORS



Copeland  
brand products



embraco



FUJITSU

Honeywell



SANYO



Residential A/C



Commercial A/C



Refrigeration



**SPECTRONICS**  
CORPORATION

ISO 9001:2015 CERTIFIED COMPANY



**SPECTROLINE**<sup>®</sup>
  
 LEAK DETECTION

## Contents

- NEW Dye Formulation**
- AR-GLO<sup>®</sup> 5 Fluorescent Leak Detection Dye.....3
- Dye Injection Systems**
- EZ-Ject<sup>™</sup> Dye Injection System .....4
- GLO-STICK<sup>®</sup> Dye Capsule System.....5
- BigEZ<sup>™</sup> Dye Injection System.....6
- Bottled Dyes**
- AR-GLO<sup>®</sup>5E Fluorescent Leak Detection Dye.....7
- WATER-GLO<sup>®</sup> 802 Fluorescent Leak Detection Dye .....7
- System Additives & Dye Cleaner**
- GLO Seal<sup>™</sup> Fluorescent Dye with Sealant .....8-9
- Cool Seal<sup>™</sup> A/C Leak Sealer ..... 10-11
- ACID-BUSTER<sup>™</sup> Acid Scavenging Solution ..... 11
- GLO-AWAY<sup>®</sup> PLUS Fluorescent Dye Cleaner ..... 11
- Leak Detection Lamp**..... 12
- The Spectroline Advantage**..... 13
- FAQ** ..... 14
- Dosage Charts** ..... 15

## FLUORESCENT LEAK DETECTION:

Working for you **24/7** – Once **IN**, always **ON**.



**Add** dye to the system & let it circulate

**Scan** system with a Spectroline leak detection lamp and see any leaks **glow brightly**

Dye continues circulating in the system working for you around the clock, **24/7** to quickly identify any future leaks

Have peace of mind you're using the **ultimate leak detection** and preventative maintenance solution in the industry!



Introducing the  
**NEW & IMPROVED**

# AR-GLO<sup>®</sup> 5 FLUORESCENT DYE

For 2019, Spectroline is proud to announce the release of AR-GLO<sup>®</sup> 5 Fluorescent Dye – **our brightest, highest quality, and most advanced dye formula ever.**

The new AR-GLO<sup>®</sup> 5 dye formula fluoresces up to **10% brighter.** That's a big improvement and sets us even further apart from other brand formulations on the market.

In addition, AR-GLO<sup>®</sup> 5 dyes have an **increased resistance to extreme temperature ranges and moisture.** The bottom line: these quality dyes perform better under difficult conditions and have greater stability, making them the perfect tool **for long-term preventative maintenance and leak detection.**

The dye has a much greater shelf life. It can be stored up to **150% longer.**



Fluoresces up to  
**10% Brighter\***

Find AC&R leaks quicker & more easily



**Improved Stability**

More tolerant to extreme temperature range & moisture



**Improved Shelf Life**  
**150% Improvement**

Up to 5 years



**More Eco-Friendly**


Formulated with safe raw materials & helps reduce refrigeration emissions into the atmosphere



**Exclusive Formula**

From the inventors & most trusted name in fluorescent leak detection

Spectroline<sup>®</sup> dyes **glow brighter** than the competition.

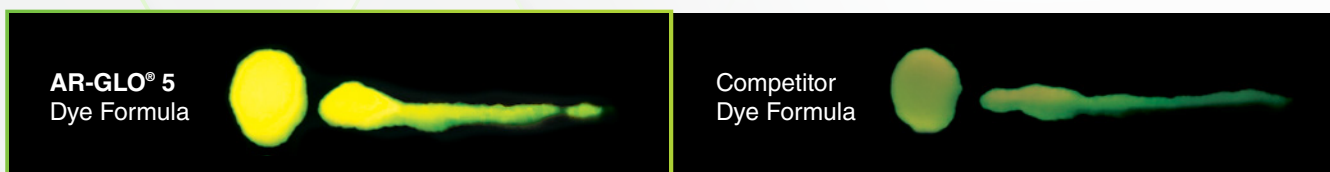

*Shown under 400 nm light with amber glasses*

*\*Depending on system application ratio*

# EZ-Ject™ (Patented) Fluorescent Dye Injection System

The revolutionary way to add fluorescent dyes into air conditioning and refrigeration systems — without the use of additional refrigerant, manifold and additional hoses.

- ▶ No pouring and no refrigerant required for injection.
- ▶ One calibrated cartridge provides exact dosing for multiple systems. Easily overcomes system pressure.
- ▶ Inject dye with a turn of the handle.



**S-M**

**Small-Medium  
Sized AC&R Systems**



**AR-GLO® 5E: Brighter  
Performance Dye**

**Works in all AC&R  
systems, overcomes  
system pressure up to:**

**450  
PSI**



**Co-Solvent  
Free Dye**



**Multi-Dose  
Cartridge**



## EZ-Ject™ COMPLETE Fluorescent Leak Detection Kit

**SPE-HVLEZE**

- ▶ **SPE-HVL-CS** violet light LED leak detection lamp
- ▶ **SPE-EZ5E** (2) 0.5 oz (15 ml) universal/POE dye cartridges
- ▶ **EZ-50** EZ-Ject™ dye injector assembly
- ▶ **EZ-25** 8 in (20 cm) EZ-Ject™ hose assembly with low-loss fitting & check valve
- ▶ **128186** R-410a adapter



Universal/POE Dye: NSF Certified to meet food-grade processing requirements for category codes HTX-2 and HX-2



## EZ-Ject™ Fluorescent Dye Injection Kit

**SPE-EZ100E-CS**

- ▶ (2) **SPE-EZ5E** 0.5 oz (15 ml) universal/POE dye cartridges
- ▶ **EZ-50** EZ-Ject™ dye injector assembly
- ▶ **EZ-25** 8 in (20 cm) EZ-Ject™ hose assembly with low-loss fitting & check valve
- ▶ **128186** R-410a adapter

Treats a **TOTAL** up to:

- ▶ **4 gal** (15.2 ml) of lubricant or
- ▶ **50 lbs** (22.6 kg) of refrigerant or
- ▶ **24 tons** (84.4 kW) of cooling




## EZ-Ject™ Fluorescent Dye Cartridge

**SPE-EZ5E-CS**

- ▶ 0.5 oz (15 ml) universal/POE dye cartridge

Treats up to:

- ▶ **2 gal** (7.6 ml) of lubricant or
- ▶ **25 lbs** (11.3 kg) of refrigerant or
- ▶ **12 tons** (42.2 kW) of cooling

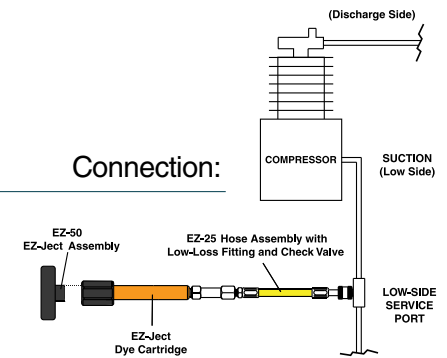

# GLO-STICK® (Patented) Fluorescent Dye Capsule System

Convenient, mess-free, single-dose capsules. Add refrigerant and fluorescent dye in one simple step.

- ▶ Available in 4 sizes/concentrations to match the capacity of the system.
- ▶ Inject dye while charging with refrigerant, or when connecting from the high side to the low side.



Dye Injection System

**AR-GLO® 5E:** Brighter Performance Dye

Works in all AC&R systems, overcomes system pressure up to: **450 PSI**

Co-Solvent Free Dye

Single-Dose Capsules



## GLO-STICK® COMPLETE Fluorescent Leak Detection Kit


### SPE-HVLGSE

- ▶ **SPE-HVL-CS** violet light LED leak detection lamp
- ▶ **SPE-GS1E** (1) 0.5 oz (15 ml) universal/POE GLO-STICK® dye capsule
- ▶ **SPE-GS2E** (2) 0.5 oz (15 ml) universal/POE GLO-STICK® dye capsules
- ▶ **SPE-GS3E** (1) 0.5 oz (15 ml) universal/POE GLO-STICK® dye capsule
- ▶ **BV-50** bleed valve for attaching GLO-STICK® capsule to service hose
- ▶ **EZ-25** 8 in (20 cm) EZ-Ject™ hose assembly with low-loss fitting & check valve
- ▶ **PC-0249** purge capsule
- ▶ **128186** R-410a adapter

**VIOLET LIGHT LED** | **3x AAA Batteries Included** | **Fluorescence Enhancing** | **GLO-AWAY™ Plus +** | **Service Labels** | **3x Drip Plugs**

**NSF** Universal/POE Dye: NSF Certified to meet food-grade processing requirements for category codes HTX-2 and HX-2

### Connection:

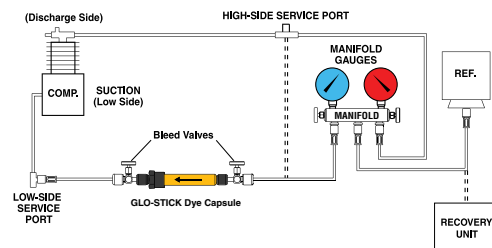

### GLO-STICK® 101E Fluorescent Dye Capsule

#### SPE-GS101E-CS

- ▶ 0.03 oz (0.89 ml) universal/POE dye capsule
- Treats up to:
  - ▶ **15 oz** (445 ml) of lubricant or
  - ▶ **2.9 lbs** (1.3 kg) of refrigerant or
  - ▶ **1 ton** (3.5 kW) of cooling



### GLO-STICK® 1E Fluorescent Dye Capsule

#### SPE-GS1E-CS

- ▶ 0.5 oz (15 ml) universal/POE dye capsule
- Treats up to:
  - ▶ **15.1 oz to 1.6 qt** (445 ml to 1.5 L) of lubricant or
  - ▶ **3 to 4.9 lb** (1.4 to 2.2 kg) of refrigerant or
  - ▶ **2 tons** (7 kW) of cooling



### GLO-STICK® 2E Fluorescent Dye Capsule

#### SPE-GS2E-CS

- ▶ 0.5 oz (15 ml) universal/POE dye capsule
- Treats up to:
  - ▶ **1.7 to 3.2 qt** (1.6 to 3 L) of lubricant or
  - ▶ **5 to 9.9 lb** (2.3 to 4.5 kg) of refrigerant or
  - ▶ **6 tons** (21.1 kW) of cooling



### GLO-STICK® 3E Fluorescent Dye Capsule

#### SPE-GS3E-CS

- ▶ 0.5 oz (15 ml) universal/POE dye capsule
- Treats up to:
  - ▶ **3.3 qt to 2 gal** (3.1 to 7.6 L) of lubricant or
  - ▶ **10 to 25 lb** (4.6 to 11.3 kg) of refrigerant or
  - ▶ **12 tons** (42.2 kW) of cooling

For systems using PVE lubricant: SPE-GS101PVE-P6, SPE-GS1PVE-P6, SPE-GS2PVE-P6, SPE-GS3PVE-P6

# BigEZ™ (Patented) Fluorescent Dye Injection System

No pouring, no refrigerant, no spills — prefilled BigEZ™ cartridges are clearly labeled with 32 or 64 calibrations so you'll introduce exactly the right amount of dye every time!

- ▶ One calibrated cartridge provides exact dosing for multiple systems.
- ▶ Easily overcomes system pressure.
- ▶ Inject dye with a turn of the handle.



**AR-GLO® 5E:** Brighter Performance Dye

Works in all AC&R systems, overcomes system pressure up to:

**200 PSI**



Co-Solvent Free Dye



Multi-Dose Cartridge



## BigEZ™ COMPLETE Fluorescent Leak Detection Kit


**SPE-HVLBEZE**

- ▶ **SPE-HVL-CS** violet light LED leak detection lamp
- ▶ **SPE-BEZ5E** 4 oz (118 ml) BigEZ™ fluorescent dye cartridge
- ▶ **BEZ-50** BigEZ™ dye injector assembly
- ▶ **BEZ-25** 8 in (20 cm) BigEZ™ hose assembly with low-loss fitting & check valve

<b>VIOLET LIGHT LED</b>	<b>3x AAA</b> Batteries Included	<b>Fluorescence Enhancing</b>	<b>GLO-AWAY™ Plus +</b>	<b>Service Labels</b>	<b>3x Drip Plugs</b>	<b>128186 R-410a Adapter</b> Additional accessory (sold separately)
-------------------------	-------------------------------------	-------------------------------	-------------------------	-----------------------	----------------------	--

**Also Available:**  
**SPE-HVLBEZOLE** BigEZ™ COMPLETE  
Fluorescent Leak Detection Kit for Oil-less Systems

**NSF** Universal/POE Dye: NSF Certified to meet food-grade processing requirements for category codes HTX-2 and HX-2

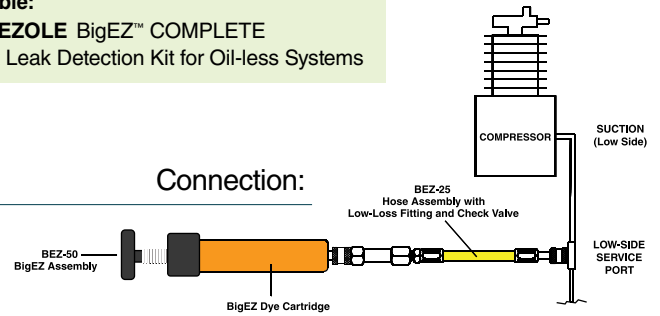

### BigEZ™ Fluorescent Dye Cartridge in Clamshell

**SPE-BEZ5E-4CS**

- ▶ 4 oz (118 ml) universal/POE dye cartridge
- Treats up to:
  - ▶ **16 gallons** (61 L) of lubricant or
  - ▶ **400 lbs** (181 kg) of refrigerant or
  - ▶ **150 tons** (527.5 kW) of cooling



### BigEZ™ Fluorescent Dye Cartridge

**SPE-BEZ5E-8**

- ▶ 8 oz (237 ml) universal/POE dye cartridge
- Treats up to:
  - ▶ **32 gallons** (122 L) of lubricant or
  - ▶ **800 lbs** (362 kg) of refrigerant or
  - ▶ **300 tons** (1055.1 kW) of cooling



### BigEZ™ Fluorescent Dye Cartridge for Oil-Less Systems

**3 Pack**

**SPE-BEZOLE-4P3**

- ▶ (3) 4 oz (118 ml) universal/POE dye cartridges
- Treats a **TOTAL** of up to:
  - ▶ **625 lbs** (283.5 kg) of refrigerant or
  - ▶ **77 tons** (270.8 kW) of cooling

**Also Available:**  
**SPE-BEZ400E-CS** BigEZ™ Fluorescent Dye Injection Kit

## AR-GLO® 5E (Patented) Fluorescent Leak Detection Dye

AR-GLO® bottled dyes can be poured directly into any AC&R system. Dye can remain safely in the system to confirm repairs and perform future preventive maintenance checks.

- ▶ Universal/POE dye is compatible with **ALL** refrigerants and lubricants
- ▶ Fluoresces up to **10% brighter**
- ▶ Improved Shelf Life – Up to 5 years!
- ▶ Improved Stability – More tolerant to extreme temperature range & moisture
- ▶ Environmentally Sound – Natural safe raw materials, small carbon footprint
- ▶ Exclusive Formula – From the inventors and most trusted name in fluorescent leak detection



Universal/POE Dye: NSF Certified to meet food-grade processing requirements for category codes HTX-2 and HX-2



### AR-GLO® 5E Fluorescent Leak Detection Dye

**SPE-AG5E-16**

- ▶ 16 oz (473 ml) twin neck bottle
- Treats up to:
- ▶ **64 gallons** (242 L) of lubricant

\*Additional sizes available

## WATER-GLO® 802 (Patented) Fluorescent Leak Detection Dye

Find leaks fast in industrial sized water and water/glycol-based fluid systems. Ideal for heat transfer fluid system applications, including boilers, chillers, geothermal heat pump systems and many more.

- ▶ Highly concentrated dye that fluoresces green
- ▶ Works with **ANY** leak detection lamp
- ▶ Pinpoint leaks in piping, valves, condensers, seals, welds, and fittings
- ▶ Ideal for use as part of a diagnostic/preventive maintenance program



WATER-GLO® 802 Dye: NSF Certified to meet food-grade processing requirements for category codes G7, GX and HTX-2



### WATER-GLO® 802 Fluorescent Leak Detection Dye

**WATER-GLO 802-P**

- ▶ 16 oz (473 ml) twin neck bottle
- Treats up to:
- ▶ **1,000 gallons** (3,800 L) of water

**NEW!**

# GLOSEAL™

## Fluorescent Dye with Sealant

- ▶ Pinpoint micro-leaks with our exclusive, OEM-Grade dye formula
- ▶ 2-in-1 premium dye with powerful sealant
- ▶ Concentrated dye ensures all leaks are found
- ▶ Sealant repairs hidden micro-leaks and stops deterioration from the inside
- ▶ Perfect for preventative maintenance – Scan the system to reveal new leaks
- ▶ Works for you 24/7 – Continuous leak detection and ongoing sealing

**S-M**

Small-Medium  
Sized AC&R Systems



**PREMIUM DYE**

+ Powerful Sealant

**1.** Find & Fix  
Immediate Leaks



**2.** Seal Difficult  
to Find Leaks



**3.** Leak Detection &  
Ongoing Sealing

# THE POWER OF GLOSEAL™

**OEM-GRADE**  
Fluorescent Dye

**2-IN-1**  
Solution

**COMPATIBLE**  
with All Refrigerants

**POWERFUL & SAFE**  
Non-Polymer Sealant,  
Not Activated by Air or Moisture





**24/7**  
Performance

**MULTIPLE**  
Delivery Methods





## How GLO Seal™ Works

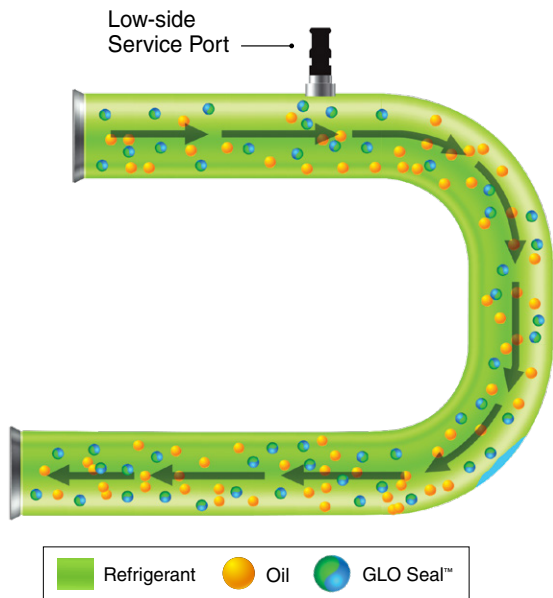

### 1. Find & Fix Immediate Leaks

Scan the system with a UV Light to find all leak areas glow brightly with GLO Seal™ concentrated dye. Make an external repair to ensure all large leaks are fixed. GLO Seal™ can remain safely in the system.



### 2. Seal Difficult to Find Leaks

GLO Seal™ pinpoints the location of all internal micro-leaks, forming a repair from the inside.



### 3. 24/7 Leak Detect + Ongoing Sealant

Scan the system periodically to find new leaks. Small, hard-to-find leaks hurt system performance and will eventually lead to total compressor burnout. Have peace of mind as GLO Seal™ works for you 24/7 for continual leak detection and ongoing sealing!

## EZ-Ject™ Injection Method



### GLO Seal™ Fluorescent Dye + Sealant EZ-Ject™ Dye Injection Kit

**SPE-EZDSK-CS** **NEW!**

- ▶ **SPE-EZDS** (2) 0.5 oz (15 ml) EZ-Ject™ cartridges prefilled with GLO Seal™ Fluorescent Dye + Sealant
- ▶ **EZ-50** EZ-Ject™ dye injector assembly
- ▶ **EZ-25** 8 in (20 cm) Cool Seal™ EZ-Ject™ hose assembly with low-loss fitting & check valve
- ▶ **128186** R-410a adapter
- ▶ Service labels

Treats a **TOTAL** of up to:  
▶ **5 tons** (17.6 kW) of cooling



**Reusable Injector Assembly:**  
Save money on unnecessary hardware with each application!




### GLO Seal™ Fluorescent Dye + Sealant EZ-Ject™ Cartridge

**SPE-EZDS-CS** **NEW!**

- ▶ 0.5 oz (15 ml) EZ-Ject™ cartridge prefilled with GLO Seal™ Fluorescent Dye + Sealant
- Treats up to:  
▶ **2.5 tons** (8.8 kW) of cooling

Connection:



## Stick Capsule Injection Method




### GLO Seal™ Fluorescent Dye + Sealant Stick Capsule

**SPE-GSDS-CS** **NEW!**

- ▶ 0.5 oz (15 ml) stick capsule prefilled with GLO Seal™ Fluorescent Dye + Sealant
- ▶ Requires bleed valves for injection

Treats up to:  
▶ **2.5 tons** (8.8 kW) of cooling

Connection:

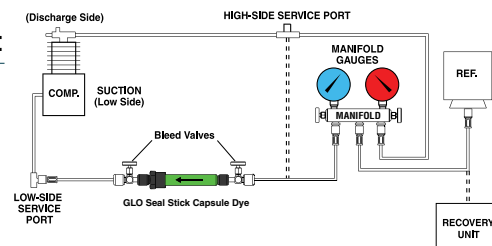

### Bleed Valve

**BV-50**

- ▶ Requires two (not included)



# COOLSEAL™ (Patented) A/C Leak Sealer

Seals micro leaks in condensers, evaporators, O-rings and hoses. Can add years to older, out-of-warranty AC&R systems that leak small amounts of refrigerant.

- ▶ Works with all popular refrigerants and oils.
- ▶ Remains safely in system to help protect against future leaks.

**S-M**

**Small-Medium  
Sized AC&R Systems**



**SAFE, NON-POLYMER**  
Oil-Soluble Formula



Meets  
**ASHRAE 97** Standards  
for Chemical Stability



**Three Convenient  
Delivery Methods**

## EZ-Ject™ Injection Method



### Cool Seal™ EZ-Ject™ Injection Kit

**CS-100CS**

- ▶ **CS-1** (2) 0.5 oz (15 ml) EZ-Ject™ cartridges prefilled with Cool Seal™ A/C Leak Sealer
- ▶ **EZ-50** EZ-Ject™ dye injector assembly
- ▶ **CS-25** 8 in (20 cm) Cool Seal™ EZ-Ject™ hose assembly with low-loss fitting & check valve
- ▶ **128186** R-410a adapter
- ▶ Service labels

Treats a **TOTAL** of up to:  
▶ **4 tons** (14 kW) of cooling



### Cool Seal™ EZ-Ject™ Cartridge

**CS-1CS**

- ▶ 0.5 oz (15 ml) EZ-Ject™ cartridge prefilled with Cool Seal A/C Leak Sealer

Treats up to:

- ▶ **2 tons** (7 kW) of cooling

**Also Available:**

**CS-1/15CS** Cool Seal™ EZ-Ject™ Contractor's Value Pack (15) **CS-1** 0.5 oz (15 ml) Cool Seal™ A/C leak sealer cartridges. Treats a **total of 30 tons** (105.5 kW) of cooling.

**15  
Pack**

## Stick Capsule Injection Method



### Cool Seal™ Stick Capsule

**CS-3CS**

- ▶ 0.5 oz (15 ml) stick capsule prefilled with Cool Seal™ A/C Leak Sealer
- ▶ Add Cool Seal™ A/C Leak Sealer and refrigerant in one simple step
- ▶ Requires bleed valves for injection

Treats up to:  
▶ **2 tons** (7 kW) of cooling



### Bleed Valve

**BV-50**

- ▶ Requires two (not included)

## BigEZ™ Injection Method



### Cool Seal™ BigEZ™ Cartridge

**CS-2CS**

- ▶ 2 oz (60 ml) large, prefilled cartridge works with BigEZ™ injector
- ▶ Can also be used with EZ-Ject™ injector

Treats up to:

- ▶ **8 tons** (28.1 kW) of cooling

**BigEZ™ Assembly:**

- BEZ-50** BigEZ™ injector assembly
- CS-35** 8 in (20 cm) BigEZ™ hose assembly with low-loss fitting & check valve

**EZ-Ject™ Assembly:**

- EZ-50** EZ-Ject™ dye injector assembly
- CS-50** EZ-Ject™ adapter
- 119690** Purge fitting

**NOTE:** Injection assembly not included.

# ACID-BUSTER™ (Patented)

## Acid Scavenging Solution

Twice as concentrated as competitive solutions. Works with **ALL** refrigerants and lubricants (mineral oil, POE, PVE, and alkyl benzene lubricant).

- ▶ Compatible with semi-hermetic, hermetic and scroll compressors.
- ▶ Direct, reusable injector eliminates the need for an oil pump.



**S-M** Small-Medium  
Sized AC&R Systems



Eliminates Acid Buildup  
in AC&R Systems

Works in all AC&R  
systems, overcomes  
system pressure up to:

**450  
PSI**



Prevents  
Compressor Burnout



### ACID-BUSTER™ EZ-Ject™ Injection Kit

**AB-100CS**

- ▶ **AB-5** (2) 0.5 oz (15 ml) EZ-Ject™ cartridges prefilled with ACID-BUSTER™ Acid Scavenging Solution
- ▶ **EZ-50** EZ-Ject™ injector assembly
- ▶ **EZ-25** 8 in (20 cm) EZ-Ject™ hose assembly with low-loss fitting & check valve
- ▶ **128186** R-410a adapter
- ▶ Service labels

Treats a **TOTAL** of up to:  
▶ **64 oz** (1,892 ml) of lubricant



### ACID-BUSTER™ EZ-Ject™ Cartridge

**AB-5CS**

- ▶ 0.5 oz (15 ml) EZ-Ject™ cartridges prefilled with ACID-BUSTER™ Acid Scavenging Solution
- Treats up to
- ▶ **32 oz** (946 ml) of lubricant

# GLO-AWAY® PLUS +

## Fluorescent Dye Cleaner

- ▶ New formulation that works to dissolve fluorescent dye from the leak site.
- ▶ Requires less application & less time removing left over dye.



**CONCENTRATED**  
Stronger formula makes it  
easier to remove the toughest  
dye stains.

**NEW & IMPROVED!**



### GLO-AWAY® PLUS

#### Fluorescent Dye Cleaner

**128484**

- ▶ 2 oz (60 ml) spray bottle



**NEW & IMPROVED**  
Lamp Design

## Violet Light LED Leak Detection Lamp

Economical and powerful, cordless leak detection lamp. Reveals even the smallest refrigerant leaks!

### SPE-HVL-CS

- ▶ Provides optimal fluorescent dye response and contrast
- ▶ Pre-focused beam optimizes fluorescent response
- ▶ Compact design easily gets into tight, cramped spaces
- ▶ Rugged, corrosion-resistance anodized lamp body stands up to years of heavy use
- ▶ Anti-roll cuff
- ▶ Runtime: 5 hours



Universal/POE  
Dyes Only

**NOTE:** For most applications, our violet light lamp does not require fluorescence-enhancing glasses.



UP TO  
**25 ft** (8 m)  
Inspection  
Range

**5h**  
Runtime

**3x**  
AAA  
Batteries  
Included


**Fluorescence  
Enhancing**



The Spectroline® brand is **trusted** by more **HVAC/R OEMs** than any other brand...



# FREQUENTLY ASKED QUESTIONS



**UV MAN**  
IS HERE TO  
ANSWER YOUR  
QUESTIONS!

## Why is Spectroline trusted by more OEMs than any other brand?

Spectronics Corporation invented fluorescent leak detection in 1955. Today, we are the world's leading manufacturer of ultraviolet equipment and fluorescent leak detection dye. Spectroline products are the first and only choice for AC&R professionals. Our OEM-approved fluorescent dyes are co-solvent free, NSF certified, and can safely remain within AC&R systems.

## How do I use fluorescent leak detection dye?

Simply add our patented dye to the suspect system. Let the dye circulate. Once the dye has permeated the system, scan for leaks with one of our high-intensity leak detection flashlights. All leak sites will glow brightly with escaping fluorescent dye.

## Which injection method should I use?

Use our EZ-Ject™ or GLO-STICK® injection method for small-to-medium sized AC&R systems – such as residential units, ice machines, window units, and refrigerators. Use our BigEZ™ injection method for medium-to-large sized AC&R systems – e.g., commercial units, supermarket units, refrigerated warehouses, food and dairy plants, and industrial facilities. Review our product dosage information for the correct application.

## What are co-solvents and how do they alter system performance?

Co-solvents are chemical substances added to increase the solubility of specific compounds. This means co-solvents harmfully change the original lubricant properties of refrigerant oil. Co-solvents can lead to premature wear and outright damage. Poorly manufactured fluorescent dyes typically contain high levels of co-solvents. In addition to changing system properties, co-solvents have the potential to deteriorate system metals.

## Why is dye concentration important?

Dye fluorescence is dependent on the ratio of fluorescent material to carrier oil. Poor performing dyes typically have low levels of fluorescent material. Simply put, poor dyes lack the concentration necessary to provide an effective fluorescent response. Spectroline dyes are concentrated and able to fluoresce all leak areas brightly. This means Spectroline dyes are more economical because less dye is used per application.

## How long does it take to find a leak?

In small-to-medium sized systems, you can find leaks within minutes. In commercial systems, it may take a few hours for the dye to circulate completely. For preventative maintenance, add Spectroline dye long before you have a problem. A technician can perform an inspection within a matter of seconds if the dye has already had time to fully circulate.

System Type: ①	Small Systems: Ice Machines, Window A/C Units & Refrigerators	Residential Systems	Light Commercial & Large Residential Systems	Commercial & Light Industrial Systems
<b>EZ-Ject™ Multi-Dose Cartridge for Small to Medium Sized Systems</b>				
Lubricant	Up to 15 oz (445 ml)	15.1 oz to 1.6 qt (445 ml to 1.5 L)	1.7 to 3.2 qt (1.6 to 3 L)	3.3 qt to 2 gal (3.1 to 7.6 L)
Refrigerant Charge	Up to 2.9 lb (1.3 kg)	3 to 4.9 lb (1.4 to 2.2 kg)	5 to 9.9 lb (2.3 to 4.5 kg)	10 to 25 lb (4.6 to 11.3 kg)
Tons of Cooling	Up to 1 ton (3.5 kW)	1.1 to 2 tons (3.9 to 7 kW)	2.1 to 6 tons (7.4 to 21.1 kW)	6.1 to 12 tons (21.5 to 42.2 kW)
Horsepower	Up to 1 Hp	1.1 to 4 Hp	4.1 to 10 Hp	10.1 to 25 Hp
Lines on Cartridge	1 line	2 lines	6 lines	8 - 14 lines

<b>GLO-Stick® Single-Dose Capsules for Small to Medium Sized Systems</b>				
Lubricant	Up to 15 oz (445 ml)	15.1 oz to 1.6 qt (445 ml to 1.5 L)	1.7 to 3.2 qt (1.6 to 3 L)	3.3 qt to 2 gal (3.1 to 7.6 L)
Refrigerant Charge	Up to 2.9 lb (1.3 kg)	3 to 4.9 lb (1.4 to 2.2 kg)	5 to 9.9 lb (2.3 to 4.5 kg)	10 to 25 lb (4.6 to 11.3 kg)
Tons of Cooling	Up to 1 ton (3.5 kW)	1.1 to 2 tons (3.9 to 7 kW)	2.1 to 6 tons (7.4 to 21.1 kW)	6.1 to 12 tons (21.5 to 42.2 kW)
Horsepower	Up to 1 Hp	1.1 to 4 Hp	4.1 to 10 Hp	10.1 to 25 Hp

**Lubricant Type:**

Universal/POE	<b>SPE-GS101E</b>	<b>SPE-GS1E</b>	<b>SPE-GS2E</b>	<b>SPE-GS3E</b>
PVE	<b>SPE-GS101PVE</b>	<b>SPE-GS1PVE</b>	<b>SPE-GS2PVE</b>	<b>SPE-GS3PVE</b>

① Always use the lubricant volume when it is known. Refrigerant charge, tonnage and horsepower are approximations.  
GLO-STICK® dye capsules require the use of two BV-50 bleed valves (for use on 1/4 inch flare hose fittings).

<b>BigEZ™ Multi-Dose Cartridge for Medium to Large Sized Systems</b>		
<b>SPE-BEZ5E</b>	<b>BigEZ™ Method</b>	1 line, 1/8 oz (3.7 ml) per 1/2 gal (1.9 L) of lubricant, 12.5 lb (5.7 kg) of refrigerant or 5 tons (17.6 kW) of cooling

<b>Bottled Dyes</b>		
<b>SPE-AG5E-16</b>	<b>AR-GLO® 5E</b>	0.25 oz (7.4 ml) per gallon (3.8 L) of lubricant
<b>WATER-GLO 802-P</b>	<b>WATER-GLO®</b>	16 oz (473 ml) per 1,000 gallons (3,800 L) of water

<b>GLO Seal™ Fluorescent Dye + Sealant for Small to Medium Sized Systems</b>		
<b>SPE-EZDS-CS</b>	<b>EZ-Ject™ Method</b>	Treats up to 2.5 tons (8.8 kW) of cooling
<b>SPE-GSDS-CS</b>	<b>Stick Capsule Method</b>	Treats up to 2.5 tons (8.8 kW) of cooling

<b>Cool Seal™ A/C Leak Sealer for Small to Medium Sized Systems</b>		
<b>CS-1CS / CS-1/15CS</b>	<b>EZ-Ject™ Method</b>	Treats up to 2 tons (7 kW) of cooling / Contractor Pack of (15) cartridges treats a total of 30 tons (105.5 kW) of cooling
<b>CS-2CS</b>	<b>EZ-Ject™ or BigEZ™ Method</b>	Treats up to 8 tons (28.1 kW) of cooling
<b>CS-3CS</b>	<b>Stick Capsule Method</b>	Treats up to 2 tons (7 kW) of cooling

<b>ACID-BUSTER™ Acid Scavenging Solution for Small to Medium Sized Systems</b>		
<b>AB-5CS ①</b>	<b>EZ-Ject™ Method</b>	4 lines, 1/8 oz (3.7 ml) per 8 oz (237 ml) of refrigerant oil Treats up to 32 qt (946 ml) of oil

① On severely acidic systems, double the dosage shown



# SPECTRONICS CORPORATION

Innovating for Today ✦ Imagining for Tomorrow

## INVENTORS & PIONEERS

### Since 1955

For more than 60 years, Spectronics Corporation has engineered the highest-quality, premium performance leak detection dyes and products.

As the **inventors of ultraviolet fluorescent leak detection**, we take pride in crafting the most superior leak detection dyes in the industry.

Spectronics Corporation is a family owned company with three generations of experience in delivering award-winning professional service and the industry's most powerful leak detection dyes, additives and lamps.



Spectronics Headquarters | Westbury, New York



#### PLACE AN ORDER:

Orders@Spectroline.com



#### GET SUPPORT:

CustomerService@Spectroline.com  
or call (516) 333-4840



Spectroline.com



956 Brush Hollow Rd, Westbury, NY 11590 USA  
800-274-8888 • 516-333-4840

DISTRIBUTED BY:

Stay Updated!



HVAC/R  
01/19 A18403-2  
PRINTED IN USA