


# Permanent Split Capacitor Condenser Fan

## 5.6" Diameter, Open Dripproof, Air Over

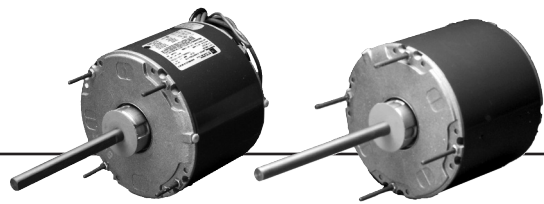


### APPLICATIONS:

Designed to meet manufacturer's requirements for condenser cooling fans.

### FEATURES:

- High Efficiency Economizer® Rated (except as noted)
- 60 Hz
- Capacitor Mounting Holes in Frame Band
- Continuous Duty, Air Over
- Water Slinger
- Designed for use with 370V Capacitors
- Automatic Reset Thermal Overload Protector
- Sleeve Bearings have All Angle Thrust System
- Green Ground Lead
- Reversible Rotation
- Class B Insulation
- Extended Studs are 8-32 UNC Thread unless otherwise noted
- 30" Leads
- Double Flats on Shaft
- Enclosed Endshield at Shaft End
- **Discount Symbol: DS-3HAC**

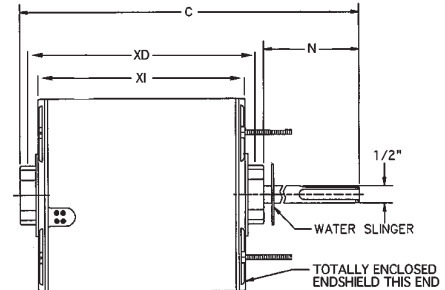

### Stud Mount, Shaft Up or Horizontal, Without Capacitor

HP	RPM/Spd.	Volts	Catalog Number	List	Bearings	Cap. MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Ship Wgt.	Notes	OEM
1/8	1550	230	1675	\$168	Slv	5.0	0.8	3.0		3.8	6.8	9		TR
1/4	825	230	8666	\$242	Slv	5.0	1.9	6.0	5.1	4.6	11.6	14		
	1075	208-230	3851	\$104	Slv	5.0	1.7	5.0	4.4	3.8	9.9	14	62	
	1075	208-230	8230	\$126	Slv	5.0	1.6	3.3	-	3.8	7.1	10	63, 72, H33, H42	
1/3	825	230	8667	\$253	Slv	7.5	2.0	6.0	5.6	5.1	12.1	16	63	
	1075	208-230	6880	\$113	Slv	5.0	2.2	5.0	4.9	4.3	9.4	12	62	
1/2	1075	208-230	3852	\$121	Slv	7.5	3.1	5.0	5.4	4.8	10.9	15	62	
	1075	230	1444	\$182	Ball	7.5	3.1	6.0	5.6	5.1	12.2	18		
3/4	1075	208-230	3097	\$148	Slv	10.0	4.8	5.0	6.6	6.1	12.1	20		
	1075	230	8665	\$204	Ball	12.5	4.4	6.0	5.9	5.3	12.4	23		
1	1080	200	8068	\$513	Ball	30.0	5.9	4.5	—	6.1	11.1	25	H9, H33	LE
	1075	208-230	1888	\$358	Ball	15.0	5.2	6.0	6.8	6.3	13.4	25	62	

LE = Lennox      TR = Trane


Note 62 Not an Economizer® model  
 Note 63 Stud Extensions Out Both Sides of Motor  
 Note 72 Includes 4 Holes in Shell for Rheem Mount

Note H9 5/8" Shaft  
 Note H33 No Hub on Lead End  
 Note H42 Shaft-end Ventilated, Lead-end Enclosed, Shaft-down Mounting Only

† All marks shown within this document are properties of their respective owners

# Permanent Split Capacitor Condenser Fan

## 5.6" Diameter, Open Dripproof, Air Over

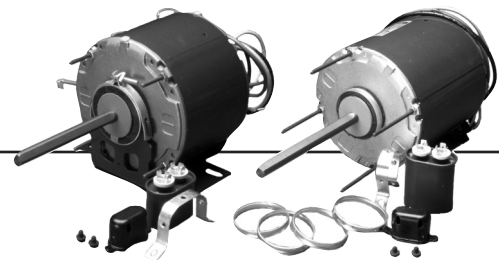


### APPLICATIONS:

For use on condenser cooling fans.

### FEATURES:

- High Efficiency Economizer® Rated (except as noted)
- 20" or 30" Leads unless otherwise noted
- Double Flats on Shaft—Economizer® Models
- Capacitor Mounting Holes in Frame Band
- Designed for use with 370V Capacitors
- Automatic Reset Thermal Overload Protector
- Sleeve Bearings have All Angle Thrust System
- Enclosed Endshield at Shaft End
- Continuous Duty, Air Over
- Class B Insulation
- Green Ground Lead
- Extended Studs
- 60 Hz
- Reversible Rotation
- Water Slinger
- Discount Symbol: DS-3HAC

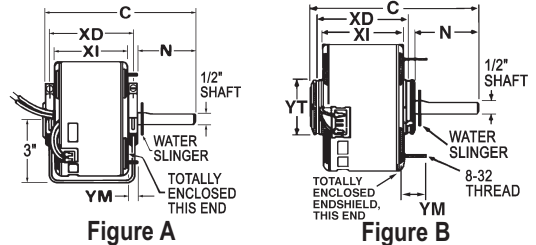

### Resilient Base, Shaft Up or Horizontal, With Capacitor

HP	RPM/Spds.	Volts	Catalog Number	List	Bearings	Cap MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wgt.	Notes	OEM
1/4	1075	230	3846	\$257	Slv	5.0	1.9	4.9	5.1	4.6	10.4	1	15	62	
1/3	1625	230	4811	\$259	Slv	5.0	1.8	4.9	5.1	4.6	10.7	1	16		
	1625	230	4961	\$360	Ball	5.0	1.8	4.9	5.1	4.6	10.7	1	17	62	
	1075	230	3847	\$269	Slv	7.5	2.2	4.9	5.5	4.9	10.9	1	16		
	1075	230	4960	\$295	Ball	7.5	2.2	4.9	5.4	4.8	10.9	1	16		
1/2	1075	230	3848	\$280	Slv	7.5	3.1	5.0	6.5	5.9	12.0	1	19		
	1075	230	7025	\$349	Ball	7.5	3.1	4.9	6.4	6.0	11.9	1	18		

### Hub Ring Mount (2 1/4"), Shaft Up or Horizontal, Without Capacitor (unless otherwise noted)

HP	RPM/Spds.	Volts	Catalog Number	List	Bearings	Cap MFD	Amps	Shaft N	Base XD	Shell XI	Total C	Stud YM	Ship Wgt.	Notes	OEM
1/5-1/6	1075	208-230	8537	\$144	Slv	5.0	1.4/1.8	3.31	4.1	3.56	7.4		10	62	RH
1/4	1075	230	8054	\$209	Slv	4.0	1.9	3.0	4.4	3.8	7.9		12		LE
1/3	825	230	5345	\$267	Ball	5.0	3.0	6.0	6.9	6.4	12.9	1	19	64	
	825	208-230	7040	\$242	Ball	7.5	2.6	6.0	6.4	6.0	12.4	1	18		
1/2	825	230	7041	\$358	Ball	12.5	2.8	6.0	6.7	5.8	13.2	1	21		

LE = Lennox

RH = Rheem

Note 62 Not an Economizer® model

Note 64 Capacitor Supplied Detached

† All marks shown within this document are properties of their respective owners



DRIVES  
BRAKE MOTORS  
GENERAL PURPOSE SINGLE PHASE  
HVAC  
WASHDOWN  
AGRICULTURE  
COMMERCIAL PUMP MOTORS  
CLOSE COUPLED PUMP MOTORS  
FIRE PUMP MOTORS  
POOL & SPA MOTORS  
RESIDENTIAL WATER PUMP  
ELEVATOR AND GATE & DOOR